




Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

better 
bathrooms

BACK LIT FRAMED MIRROR




TAUMB500
TAUBB500
TAUMB1200
TAUBB1200

- SINGLE-PERSON ASSEMBLY
- LED LIGHT
- IP44 INGRESS PROTECTION

SAFETY

- The fitting should be installed by a qualified electrician.
- This fitting is only suitable for connection to a 220V~50Hz earthed supply in accordance with current IEE wiring regulations, and should be installed in accordance with local Building Regulations.
- This is for domestic, indoor use only.
- The fitting should be connected to a dedicated lighting circuit which must be protected by a 5-amp fuse (or a 6-amp miniature circuit breaker).
- Before installing the fitting ensure the mains supply is switched off, and that the appropriate fuse is removed (or appropriate circuit breaker is switched off) before commencing installation. Ensure that measures are taken to prevent the supply from being inadvertently reconnected.
- If there is a “Minimum Distance” Label, please do not allow Flammable Materials to rest within that distance from the lamps.
- This product may contain delicate parts – be careful during handling and maintenance to avoid breakage.
- If any modification is made to the fitting it will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause electric shock. Never switch on a defective appliance. Unplug the appliance from the mains or switch off at the circuit breaker in the fuse box before seeking assistance.
- This product is IP44 rated, and so no part of the installation is allowed to be within bathroom Zones 0,1. Installation is permitted within Zone 2.
- This product must be earthed.



BATHROOM ZONES

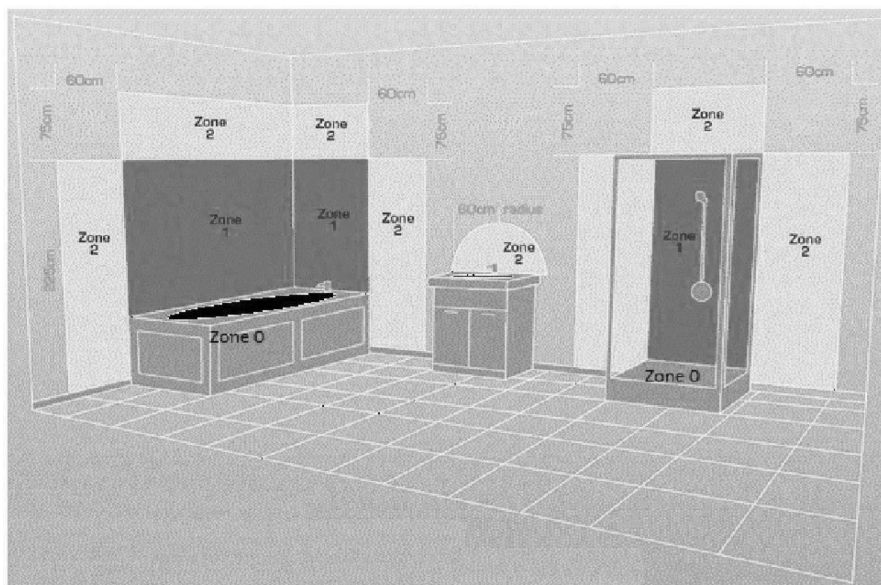

Zone 0:	The interior of the bathtub or shower basin.
Zone 1:	The area around the bathtub or shower basin up to a height of 2.25m above the floor
Zone 2:	The area stretching to 0.6m outside the bath or shower and above the bath or shower if over 2.25m



PARTS LIST

TAUB500/TAUBB500



D6 WALL PLUG x2


TAUMB1200/TAUBB1200



D6 WALL PLUG x5



TOOLS NEEDED FOR INSTALLATION



TAPE
MEASURE



ELECTRIC
DRILL



FLAT HEAD
SCREWDRIVER



SPIRIT
LEVEL



HAMMER




8MM
DRILL BIT



PENCIL

PRODUCT OVERVIEW

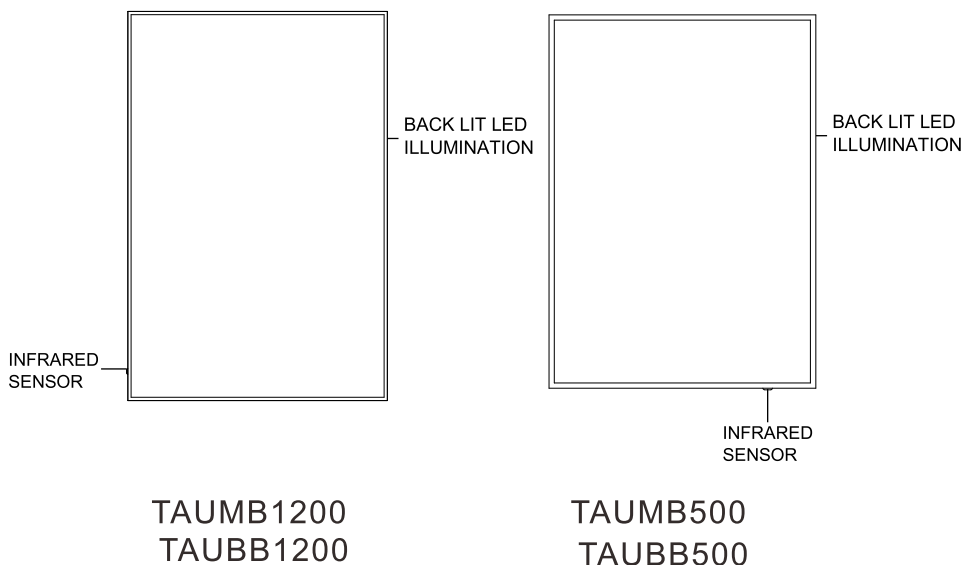

INSTALLATION

IMPORTANT: Before commencing installation, ensure that there are no pipes or wires located behind the wall that you will be drilling into.

- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage in the wall due to incorrect positioning.
- Check there the mirror is not damaged prior to installation.
- Take care unpacking, do not use a sharp blade to open as this may damage the mirror and void your warranty.

For TAUMB500/TAUBB500

At the back of the mirror, there are 2 hanging hooks spaced across the top. To hang the mirror, two holes are required in the wall. Before drilling, ensure that no wires or pipes are behind the wall. If unsure, seek professional advice.



1. Measure the distance between the centre of the two hanging points.
2. Make a note of the distance and mark their position on the wall. Use a spirit level to ensure that the marks are level.
3. Drill the 2 holes into the wall at the position marked using a suitable drill bit.
4. Insert the wall plugs into the holes.
5. Insert the screws into the wall plugs, ensuring their heads are protruding by approximately 3mm.
6. Check to ensure the screws line up correctly and the mirror can be safely hung from them.
7. Carefully lower the mirror onto the 2 screws, ensuring that it is secure and will not slide.
8. In installation, ensure that the infra-red sensor will be easily accessible and that at least 20cm space is left around the sensor to ensure correct operation.

For TAUMB1200-TAUBB1200

The mirror is supplied with two hanging bars to mount the mirror onto the wall. At the back of the mirror there are corresponding bars which are designed to slot onto the hanging bars. To hang the mirror, 5 holes are required in the wall.


Before drilling, ensure that no wires or pipes are behind the wall. If unsure, seek professional advice.

1. Choose the desired position of the mirror and from that determine the required position of the hanging bar.
2. Hold the hanging bar-1 in position using a spirit level to ensure it is level.
3. Use a pencil to mark the position of the 3 holes on the wall.



4. Place the hanging bar to one side and drill the holes with a suitable drill bit.
5. Insert wall plugs into the holes ensuring they are flush to the wall.
6. Place the hanging bar onto the wall lining up the 3 holes with the wall plugs.

7. On the back of the mirror, measure the distance a from the center of the bar-1 to the bar-2 .




8. Make a note of the distance and mark the position of the 2 holes on the wall according to the distance a
9. Place the hanging bar-2 to one side and drill the holes with a suitable drill bit.
10. Insert wall plugs into the holes ensuring they are flush to the wall.
11. Place the hanging bar-2 onto the wall lining up the 2 holes with the wall plugs
12. You will now be able to hang the mirror. Carefully lower the mirror onto the hanging bars, ensuring that it is secure and will not slide.
13. The mirror should now be connected to a suitable fused spur following current regulations and guidance. We would advise for this to be situated directly behind the mirror below the hanging bar. When connecting ensure that enough cable is left to allow the mirror to be safely removed from the hanging bar.
14. In installation, ensure that the infra-red sensor will be easily accessible and that at least 20cm space is left around the sensor to ensure correct operation.

OPERATION

Your mirror comes with an infrared sensor located on the right hand side for TAUMB500/TAUBB500, on the left hand side for TAUMB1200/TAUBB1200. To activate the light and demisting pad, move your hand across the sensor once at a distance of around 5cm.

To turn it off, move your hand across the sensor again. Hold your hand in front of the sensor to change the colour temperature of the light.



CLEANING AND MAINTENANCE

Never use products containing bleach or abrasive cleaners, as this will have a detrimental effect on the appearance and lifespan of the product.

Use a clean microfibre cloth to clean the mirror.

TECHNICAL SPECIFICATION

Model	TAUMB500	TAUBB500	TAUMB1200	TAUBB1200
WxHxD(mm)	500x700x40	500x700x40	1200x800x44	1200x800x44
Net weight (kg)	6.3	6.3	15.9	15.9
Power cord Length (cm)	70	70	115	115
Rated Power	35w	35w	80w	80w
IP Rating	IP44	IP44	IP44	IP44
Input	220V-240V 50Hz	220V-240V 50Hz	220V-240V 50Hz	220V-240V 50Hz

This product contains a light source of energy efficiency class <F>.

DISPOSAL



Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.

Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please contact the local council for details of your local household waste recycling centers.

At the time of printing the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer the regulations are monitored to ensure continued compliance. Further information can be provided upon request.

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better
bathrooms**

Part of the BuyItDirect Group