Basin/Bath/Sink Tap Installation and Maintenance

PLEASE READ THIS INSTRUCTION GUIDE FULLY PRIOR TO COMMENCING ANY PART OF THE INSTALLATION

Ŵ

PRE-INSTALLATION

Installation should only be carried out by a qualified installer Always check pressure compatibility, check website for min/max pressure of product

All parts of the installation must comply with the relevant Water Regulation requirements

Isolation valves should be fitted to both supply pipes as part of the installation

Always flush pipework prior to connection to the mixer

TURN OFF WATER SUPPLY BEFORE COMMENCING INSTALLATION OF NEW TAP

<u>GUARANTEE</u>


Check website for individual product guarantee's Some parts of the product ie valve are covered by a 12 month guarantee See our website T & C's for details Your guarantee can be invalid if the pre-installation checks are not carried out, installation is not

carried out as per this guide and correct maintenance instructions are not followed.

INSTALLATION (HOT supply to left / COLD supply to right) 1) Remove back nuts and washers if fitted to tap when received

2) Place base plates if provided, onto tap tails

- 3) Place tap tails through holes in bath/basin
- 4) From undernooth the both /basin fit washers and back puts a
- 4) From underneath the bath/basin fit washers and back nuts and tighten into position
- 5) Connect to water supply, making a watertight seal
- Furn on water supply and check for leaks

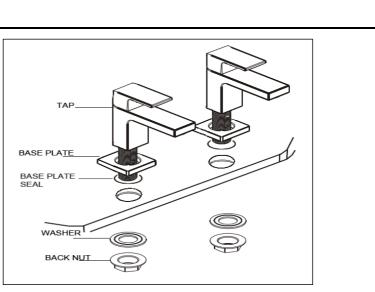

CLEANING	
No harsh chemicals should come into contact with any part of the product, no abrasive	

materials can be used to maintain the surface, use a damp cloth to wipe and dry cloth to polish.


Any splashes or spills must be rinsed and wiped dry immediately.

Use of any abrasives or chemicals will invalidate your guarantee

MIXER ISSUE	DIAGNOSIS
Tap drips after being turned off	Draining / Due to the design of some tap spouts, water will be held and drip until emptied.
	Debris inside valve / Remove valve and flush under running water whilst turning the spindle
Poor flow	Insufficient water pressure / Increase water pressure possibly installing a pump.
	System pressure should have been confirmed as meeting minimum requirement pre-installation.
	Blockage / Check water is reaching the tap, check valve, tap tails and supply pipes.
	Isolation valves not fully opened .

See over page for valve removal advice

CLEANING

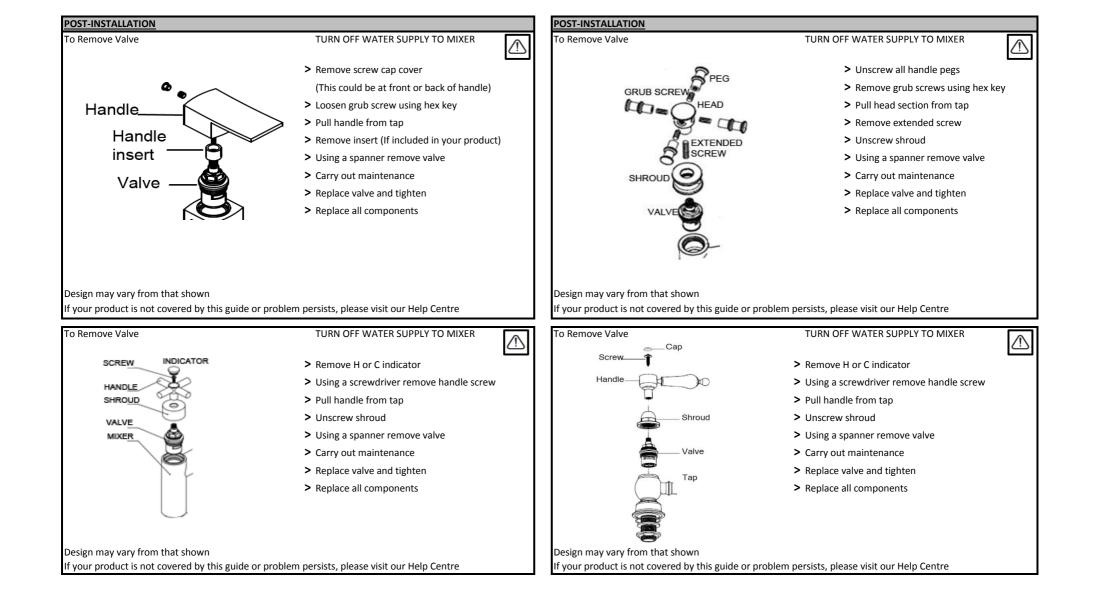

Visit Our Website For Assistance Via Our Help Centre

www.betterbathrooms.com