

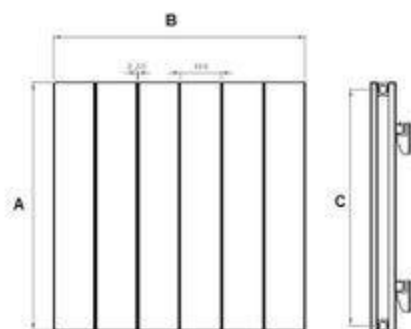
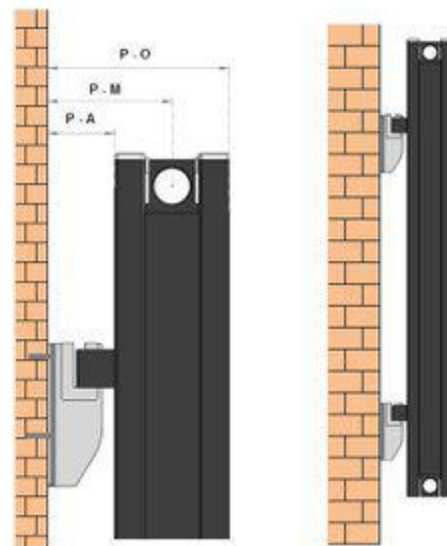


MODELL 002 - INSTALLATION GUIDE

This product must be fitted only by a fully qualified installer

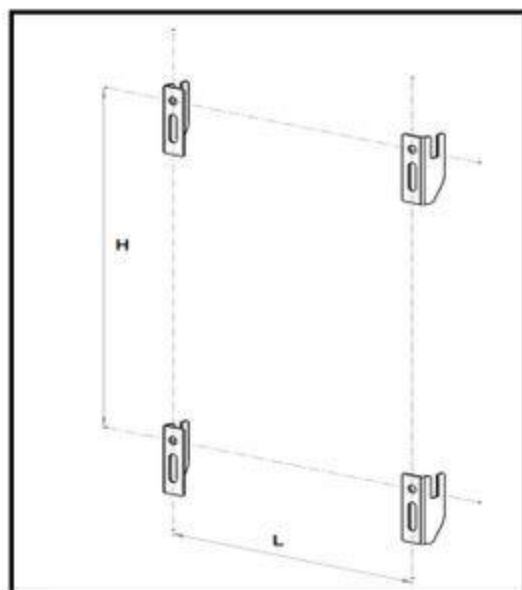

DESCRIPTION	ILLUSTRATION
Fixing choose the appropriate fixing for the wall material if required	
PTFE tape	
Electric drill	
Masonry drill bit appropriate to the fixings	
Adjustable spanner	
Radiator valve hex key	
Flat head and philips head screw drivers	
1 lock shield valve and 1 gate or thermostatic valve	
Spirit level	
Measuring tape	

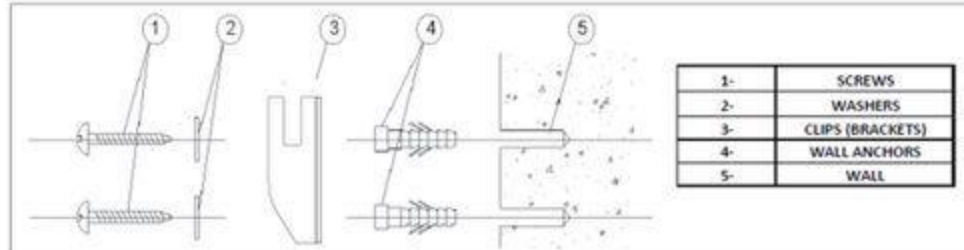

NAMES	TUBE QTY	A	B	C	P-A	P-M	P-O	H	L
MODEL - 002 - DOUBLE	3	1800	305	1.772	35	65	95	1600	183
MODEL - 002 - DOUBLE	4	1800	407	1.772	35	65	95	1600	285
MODEL - 002 - DOUBLE	5	1800	510	1.772	35	65	95	1600	183
MODEL - 002 - DOUBLE	6	1800	612	1.772	35	65	95	1600	285
MODEL - 002 - DOUBLE	3	1200	305	1.172	35	65	95	1000	183
MODEL - 002 - DOUBLE	4	1200	407	1.172	35	65	95	1000	285
MODEL - 002 - DOUBLE	5	1200	510	1.172	35	65	95	1000	183
MODEL - 002 - DOUBLE	6	1200	612	1.172	35	65	95	1000	285
MODEL - 002 - DOUBLE	4	600	407	572	35	65	95	400	285
MODEL - 002 - DOUBLE	6	600	612	572	35	65	95	400	285
MODEL - 002 - DOUBLE	8	600	817	572	35	65	95	400	490
MODEL - 002 - DOUBLE	10	600	1022	572	35	65	95	400	695
MODEL - 002 - DOUBLE	12	600	1227	572	35	65	95	400	900
MODEL - 002 - DOUBLE	14	600	1432	572	35	65	95	400	1105