

# USER MANUAL



Thank you for choosing Better Bathrooms.  
Please read this manual before installing your product  
and keep for future reference.

better  
bathrooms

**Product name: Bath Waste With Overflow Filler**



**Please note: Image is for illustrative purposes only and may differ slightly to the actual product**

- **Single-person assembly**
- **We always recommend using professional tradespeople to install your product**

V1\_03.07.2025

# Congratulations on your purchase

And welcome to our growing gang of savvy shoppers

We're on a mission to bring you extraordinary bathroom products, for less. From modern to traditional style ceramics, plus the gorgeous fixtures, fittings and furniture to match. So, you can fall in love with your space every single day .

As one of the UK's largest independent bathroom stores, we've received countless awards; including the National Business Awards UK, the Digital Entrepreneur Awards and being placed on The Sunday Times Fast Track 100.


We hope your new product exceeds your highest expectations. However, if you experience any problems, please:

- log in to your account and contact our customer services team via your self-serve portal-[betterbathrooms.com/CustomerAccount/Login](https://betterbathrooms.com/CustomerAccount/Login).
- contact us via-[betterbathrooms.com/content/contact-us](https://betterbathrooms.com/content/contact-us).

## Important information

- Please read these instructions thoroughly and retain for future reference
- Manufactured to EN274 Waste fittings for sanitary appliances

### Parts

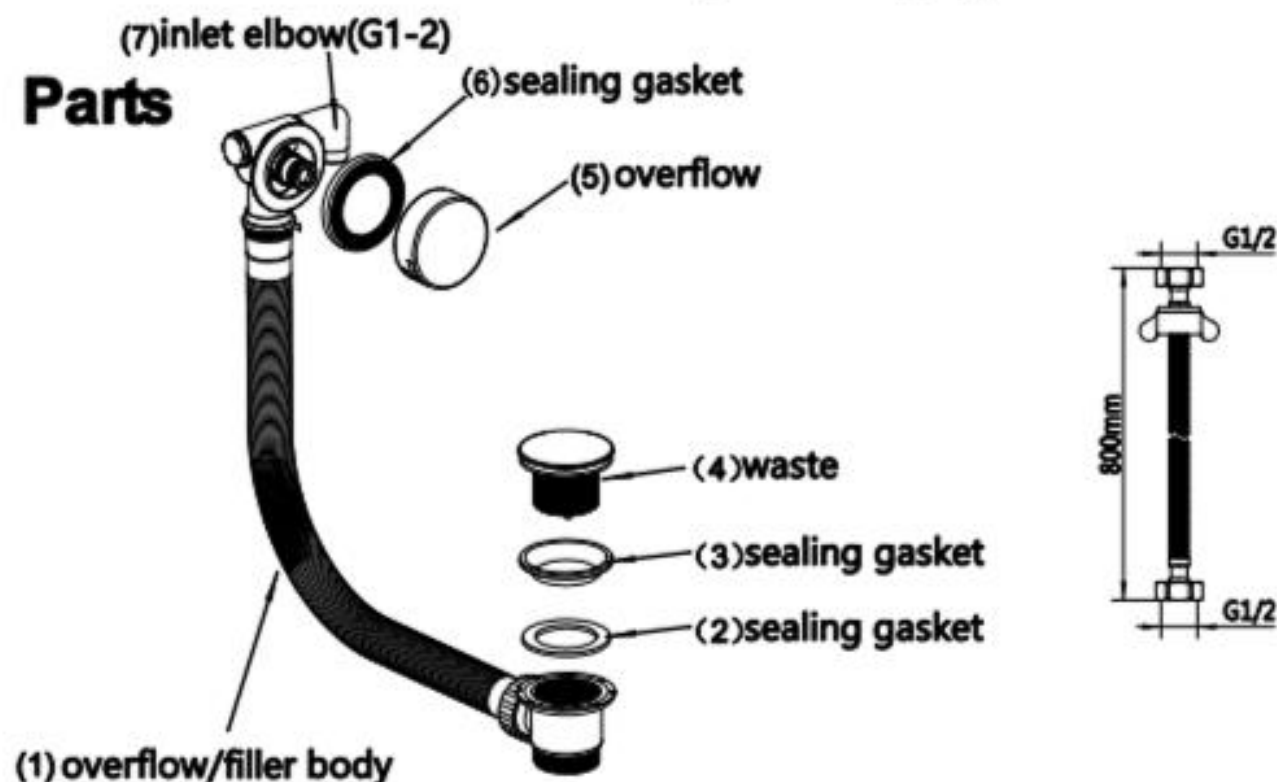

Please note that Parts are for illustrative purposes only and may differ slightly to the actual product

# Installation

1. Place the bath tub on a shelf for installing waste.



## 2. Installation for drainage part


Fit the sealing gasket (2) on the waste body (1), then insert the waste body to the underside of bath; fit the sealing gasket (3) to the waste insert (4), then thread the that into the waste body through the outlet hole of the bath and tighten it




Silicone can also be used during the installation. Once using silicone please leave for 24 hours to dry before use.

## 3. Installation for overflow part

Press the waste body (8) and gasket (6) on the outside of the bathtub overflow hole. Assemble the overflow & filler (5) to the waste body (8) and tighten it, then connect one end of the braided hose to inlet elbow (6), another end of braided hose to the water system. Please make sure there is gasket in both connector end of the braided hose.

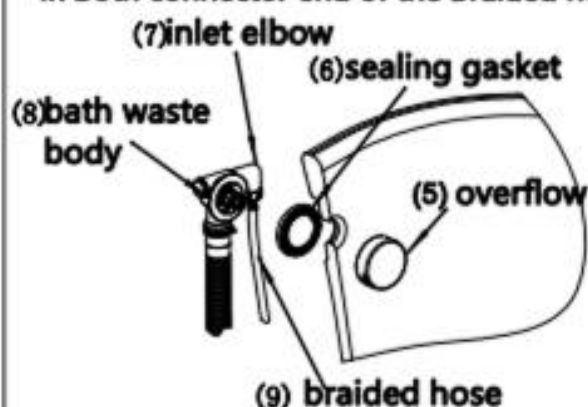

4. fill the bathtub with water and check for leaks. Place the bathtub in the prepared position, connect A side to the drainage pipe. Installation complete

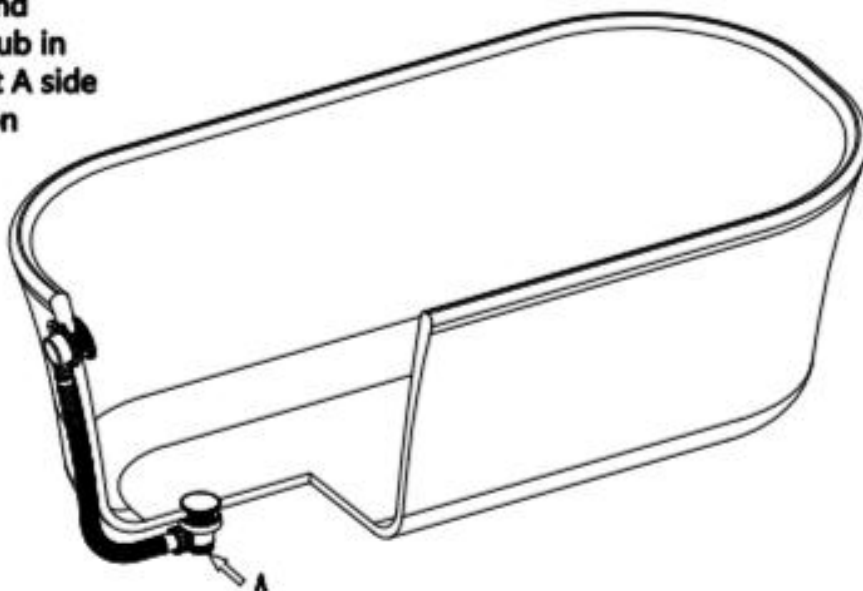


# Troubleshooting

## 1. Poor drainage


## 2. Click-clack functional failure

# Maintenance

- The poor drainage is due to the blockage of dirt, and it is necessary to unscrew the decorative ecover from waste body, and then remove the dirt from the drainager hole.

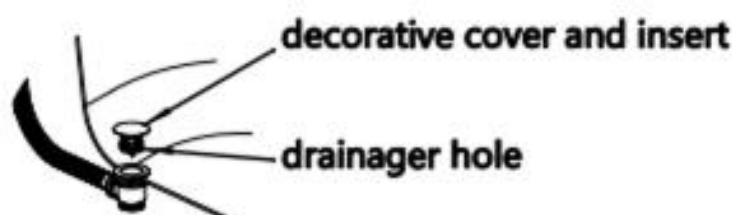

- Click-clack functional failure is caused by the insert fault, insert should be replaced. Unscrew the decorative cover from the waste body by hand, then unscrew the insert with a wrench, install a new insert and screw the decorative cover on the insert.

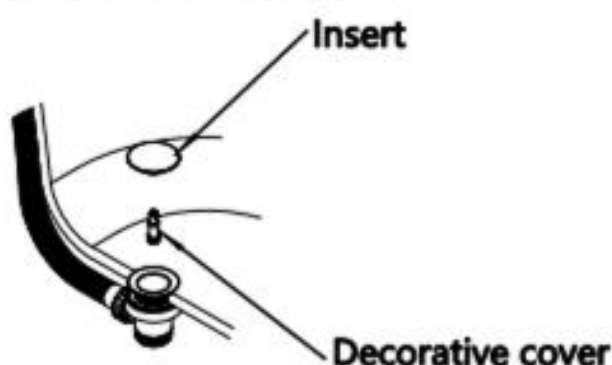

# Maintenance

To maintain the surface finish of your product, wipe clean after every use, using a clean damp cloth, a mild detergent mixture can be used. Do not use abrasive cleaning agents or materials on the product surface.

If any harsh chemicals come into contact with the surface of the product during bathroom cleaning, rinse off immediately, wipe clean and dry

### For more information

- visit [betterbathrooms.com](http://betterbathrooms.com)
- email [customerservices@buyitdirect.co.uk](mailto:customerservices@buyitdirect.co.uk)
- call 03303903062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better  
bathrooms**

Part of the BuyItDirect Group