



Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

**better
bathrooms**

WALL MOUNTED LED MIRROR WITH DEMISTER

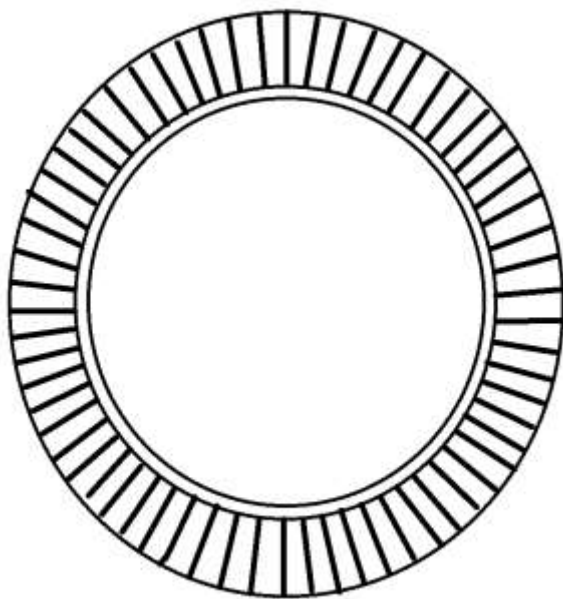

Beba-26161

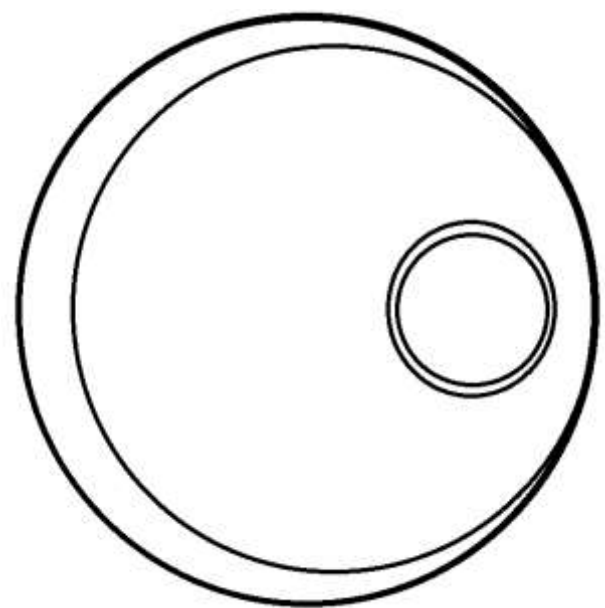

BeBa-26149

- TOUCH SENSOR CONTROL
- BUILT IN DEMISTER
- IP44 INGRESS PROTECTION
- WARM WHITE AND COOL WHITE LIGHTING

CONGRATULATIONS ON YOUR PURCHASE

Our aim at Better Bathrooms is to bring you extraordinary bathroom products, for less.

If you're after a modern, traditional, or a totally unique style bathroom, we have the fittings and fixtures to bring your ideas to life, so you can fall in love with your space every day.

We hope you're happy with your new product. But if you experience any problems, we're always here to help.

- Call our friendly UK call centre on **0330 390 3062**
(Lines open 9am-4.30pm Monday to Friday, or 9am-2pm Saturday).
- Send us a message via **betterbathrooms.com**.


CONTENTS

SAFETY	3
BATHROOM ZONES	4
PARTS SUPPLIED	5
TOOLS REQUIRED	5
INSTALLING THE MIRROR	6
OPERATION	7
CLEANING AND MAINTENANCE	7
TECHNICAL SPECIFICATIONS	7

SAFETY


- This mirror should be installed by a qualified electrician.
- This fitting is only suitable for connection to a 220-240V earthed supply in accordance with current IEE wiring regulations, and should be installed in accordance with local Building Regulations.
- This is for domestic, indoor use only.
- The fitting should be connected to a dedicated lighting circuit which must be protected by a 5-amp fuse (or a 6 amp miniature circuit breaker).
- The electrical connection must be an adequate distance from the rear of the mirror to prevent the risk of shorting with the mirror's casing.
- Before installing the fitting ensure that the mains supply is switched off, and that the appropriate fuse is removed (or appropriate circuit breaker is switched off) before commencing installation. Ensure that measures are taken to prevent the supply from being inadvertently reconnected.
- If there is a "Minimum Distance" label, please do not allow flammable materials to rest within that distance from the unit.
- This product may contain delicate parts – be careful during handling and maintenance to avoid breakage.
- If any modification is made to the fitting it will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause electric shock. Never switch on a defective or damaged appliance. Disconnect the appliance from the mains before seeking assistance.
- This product is IP44 rated, and no part of the installation is allowed to be within bathroom Zones 0 or 1. Installation is permitted within Zone 2.
- This product must be earthed. Before commencing installation, ensure that there are no pipes or wires located behind the wall that may be damaged during drilling.
- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
- Inspect the mirror to ensure there are no signs of damage prior to installation.
- Take care unpacking, do not use a sharp blade to open as this may damage the mirror and void your warranty.
- Once installed a bead of silicon can be applied between the mirror and the wall around the unit. Never seal the bottom of the mirror to the wall, as this may allow water to accumulate behind the mirror.

BATHROOM ZONES

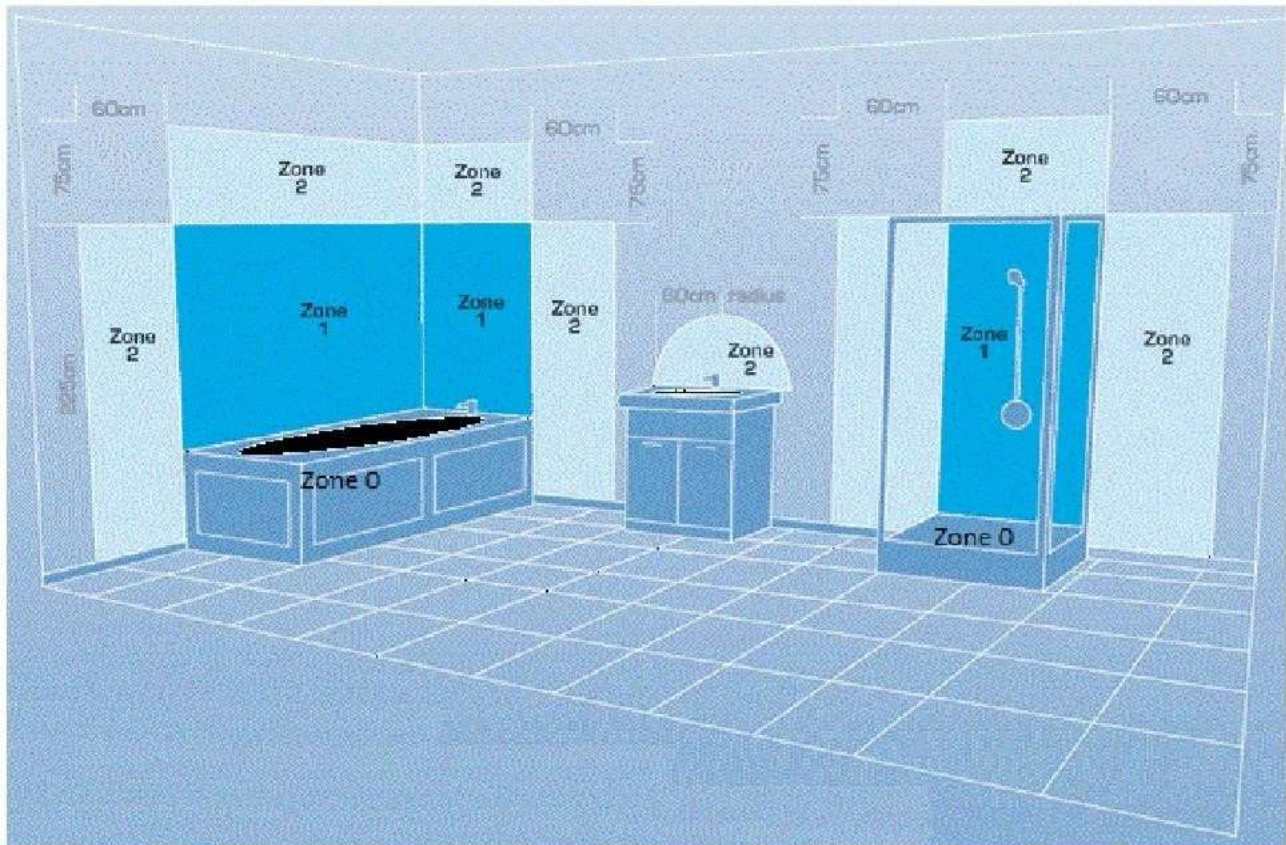

Zone 0:	The interior of the bathtub or shower basin.
Zone 1:	The area around the bathtub or shower basin up to a height of 2.25m above the floor
Zone 2:	The area stretching to 0.6m outside the bath or shower and above the bath or shower if over 2.25m


PARTS SUPPLIED



WALL PLUGS (X3)




SCREWS M4 (X3)




HANGING BAR

PLEASE NOTE: It is the installers responsibility to ensure that the fittings are suitable for the type of wall. Alternative fittings may be required (Not Supplied). If unsure professional advice should be sought.


TOOLS REQUIRED




TAPE MEASURE




SPIRIT LEVEL




ELECTRIC DRILL




SCREWDRIVER



HAMMER



8mm DRILL BIT



PENCIL


INSTALLATION

The mirror is supplied with a hanging bar to mount the mirror onto the wall. At the back of the mirror there is a corresponding bar which is designed to slot onto the hanging bar. Before attempting installation, the mirror should be unpacked and inspected for signs of damage.


1. Choose the desired position of the mirror, and from that determine the required position of the hanging bar.
2. Hold the hanging bar in position, using a spirit level to ensure it is level.
3. Use a pencil to mark the position of the 3 holes.
4. Place the hanging bar to one side, and drill the holes with an 8mm drill bit suitable for the type of wall.
5. Insert wall plugs into the holes, ensuring they are flush to the wall.
6. Place the hanging bar back onto the wall, lining up the 3 holes with the wall plugs.



7. Secure the hanging bar to the wall using the supplied screws.
8. The mirror should now be connected to a suitable fuse spur following current regulations and guidance. We would advise for this to be situated directly behind the mirror below the hanging bar. When connecting ensure that enough cable is left to allow the mirror to be safely removed from the hanging bar.
9. You will now be able to hang the mirror. Carefully lower the mirror onto the hanging bar, ensuring that it is secure and will not slide.
10. Reconnect the power supply.

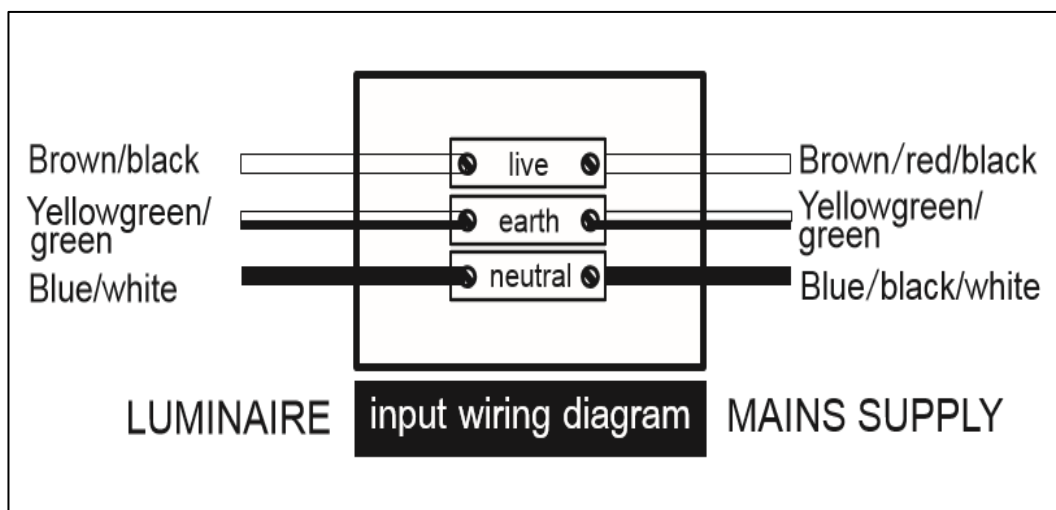

OPERATION



Press the button once to turn on the lights and to begin demisting.

Hold the button to change the colour temperature from 3000K (Warm White) to 6400K (Cool White).

Press again to turn the lights and demister off.

CLEANING AND MAINTENANCE

Never use products containing bleach or abrasive cleaners, as these will have a detrimental effect on the appearance and lifespan of the product.

Use a clean micro fiber cloth to clean the mirror.

DISPOSAL

Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.



Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please contact the local council for details of your local household waste recycling centers.

TECHNICAL SPECIFICATION

Model	BeBa-26161	BeBa-26149
WxHxD (mm)	800x800x45	700x700x45
Net Weight (Kg)	7.2	6.0
Power Cord length (cm)	50	30
Rated Power (W)	29	40
IP Rating	IP44	
Input	220 V - 240 V 50 Hz	

This product contains a light source of energy efficiency class F.

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better
bathrooms**

Part of the BuyItDirect Group