


## Installation Instructions for Cosmo Sinks Flush Mount Sink

**1.**

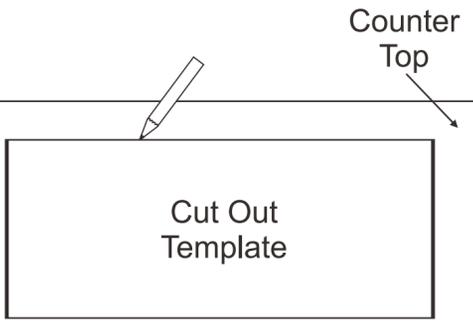


Counter Top

Cut Out Template

Place the cut-out template into the desired location and trace around the border of the template.

**2.**

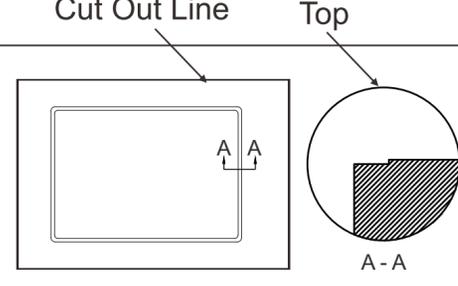


Cut Out Line      Counter Top

A - A

**NOTE: BEFORE CUTTING, DOUBLE-CHECK THE MEASUREMENTS OF YOUR TRACED LINE ARE ACCURATE TO THE SINK DIMENSIONS**

Use an appropriate cutting tool for your counter top material and cut along the template line. It is recommended to seal any exposed MDF edges.

**3.**

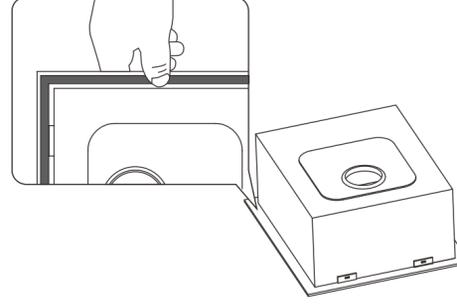


Ensuring the underside of the sink is clean and dry, apply the foam sealing tape around the underside of the sink edge, ensuring it is smooth and without creases or ridges.

### Care Instructions


- For everyday cleaning of the sink, use a mild household detergent suitable for stainless steel. After each use, rinse the sink with warm water and wipe with a soft, dry microfiber cloth.
- Do not use steel wool to clean your sink.
  - Wipe in the direction of the grain, along the lines of the bowl and drainer.
  - Do not use chemical "silver cleaners", bleaches or detergents containing chlorine or any of its derivatives.
  - Water scale can be treated using a mild cream cleaner or white vinegar and a soft cloth. Rinse with water and wipe dry.

**4.**

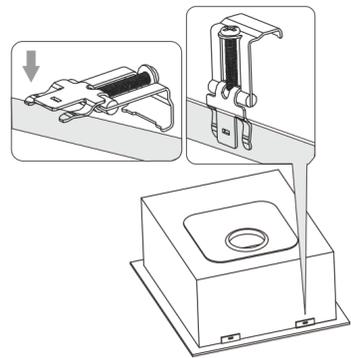

Push the fixing clips onto the cut-outs in the fixing rail to lock them into place.

**5.**

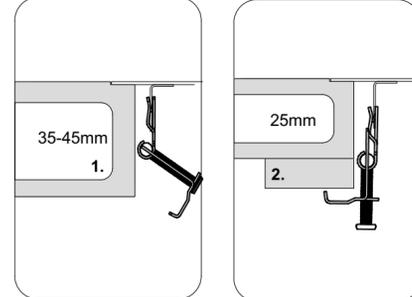


35-45mm      25mm

1.                      2.

The supplied fixing clips are designed for 35-45mm thick counter tops. If your counter top is thinner, use wood spacers to secure the clips.

After placing two fixing clips at each corner of the sink, space any remaining clips around the perimeter of the sink.

**6.**

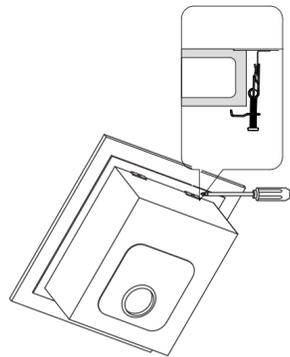


Tighten the fixing clips screws with a hand screwdriver to ensure the sink is secure. Do not over-tighten as this may result in damage.

### Warning

- If the sink comes into contact with acidic materials, rinse immediately with plenty of water and wipe with a soft, dry cloth.
- Do not leave rusty objects in contact with the sink. Rust can cause staining, cracking or even permanent damage to the sink surface.
- To avoid staining of the surface, do not leave food or other materials with corrosive properties on the sink for an extended period.
- Do not place very hot objects directly onto the sink. Place them onto a board or surface made from wood, silicone, plastic, etc.
- Avoid scraping the sink bowls or drainer surface with utensils.
- Avoid dropping heavy or sharp objects onto the sink surface.

## Installation Instructions for Cosmo Sinks Top Mount Sink


**1.**

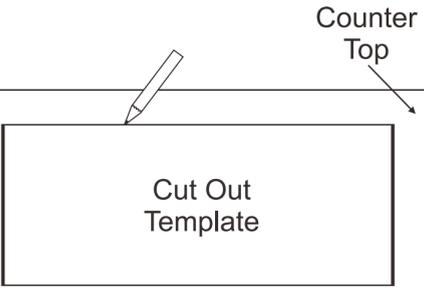

Cut Out Template

Place the cut-out template into the desired location and trace around the border of the template.

**2.**

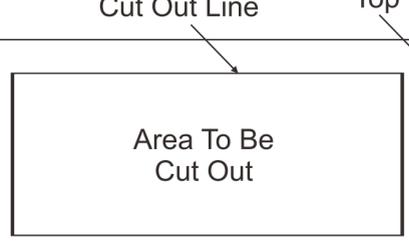


Area To Be Cut Out

**NOTE: BEFORE CUTTING, DOUBLE-CHECK THE MEASUREMENTS OF YOUR TRACED LINE ARE ACCURATE TO THE SINK DIMENSIONS**

Use an appropriate cutting tool for your counter top material and cut along the template line. It is recommended to seal any exposed MDF edges.

**3.**

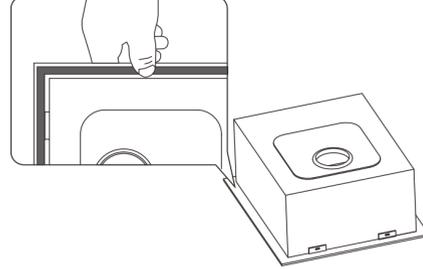

Ensuring the underside of the sink is clean and dry, apply the foam sealing tape around the underside of the sink edge, ensuring it is smooth and without creases or ridges.

### Care Instructions

For everyday cleaning of the sink, use a mild household detergent suitable for stainless steel. After each use, rinse the sink with warm water and wipe with a soft, dry microfiber cloth.


-Do not use steel wool to clean your sink.

-Wipe in the direction of the grain, along the lines of the bowl and drainer.

-Do not use chemical "silver cleaners", bleaches or detergents containing chlorine or any of its derivatives.


-Water scale can be treated using a mild cream cleaner or white vinegar and a soft cloth. Rinse with water and wipe dry.

**4.**



Push the fixing clips onto the cut-outs in the fixing rail to lock them into place.


**5.**

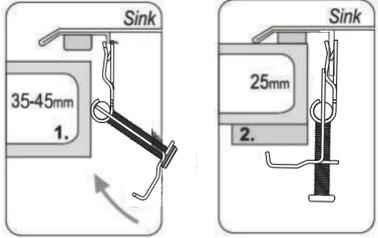

The supplied fixing clips are designed for 35-45mm thick counter tops. If your counter top is thinner, use wood spacers to secure the clips.

After placing two fixing clips at each corner of the sink, space any remaining clips around the perimeter of the sink.

**6.**



Tighten the fixing clips screws with a hand screwdriver to ensure the sink is secure. Do not over-tighten as this may result in damage.

### Warning

-If the sink comes into contact with acidic materials, rinse immediately with plenty of water and wipe with a soft, dry cloth.

-Do not leave rusty objects in contact with the sink. Rust can cause staining, cracking or even permanent damage to the sink surface.

-To avoid staining of the surface, do not leave food or other materials with corrosive properties on the sink for an extended period.

-Do not place very hot objects directly onto the sink. Place them onto a board or surface made from wood, silicone, plastic, etc.

-Avoid scraping the sink bowls or drainer surface with utensils.

- Avoid dropping heavy or sharp objects onto the sink surface.