




Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

better 
bathrooms

LED BATHROOM MIRROR WITH SLIDING DOOR

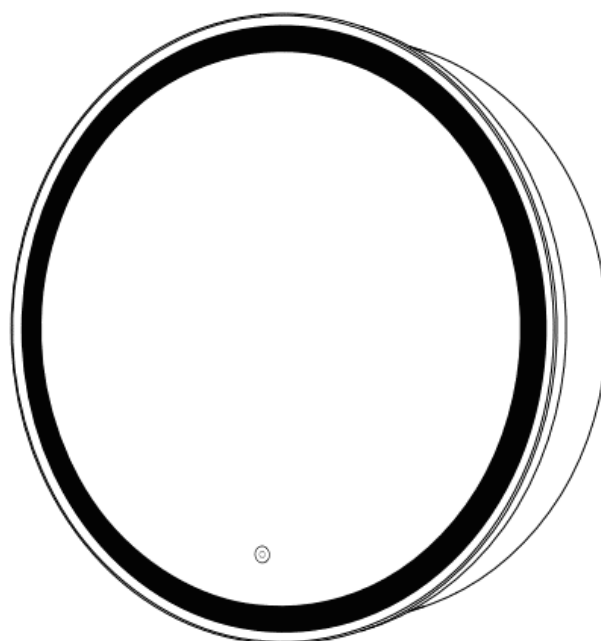

ELARA600A - BLACK

ELARABB600A - BRASS

- TOUCH CONTROL
- DEMISTER
- BLUETOOTH CONNECTIVITY
- IP44 INGRESS PROTECTION
- SLIDING DOOR

V20250609E

CONGRATULATIONS ON YOUR PURCHASE

Our aim at Better Bathrooms is to bring you extraordinary bathroom products, for less.

If you're after a modern, traditional, or a totally unique style bathroom, we have the fittings and fixtures to bring your ideas to life, so you can fall in love with your space every day.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- Log in to your account and contact our customer services team via your self-service portal – betterbathrooms.com/CustomerAccount/Login
- Contact us via betterbathrooms.com/contact/contact-us

CONTENTS


SAFETY	3
BATHROOM ZONES	4
PARTS SUPPLIED	5
TOOLS REQUIRED	5
PRODUCT OVERVIEW	5
INSTALLING THE MIRROR	6
OPERATION	9
TECHNICAL SPECIFICATIONS	10
DIMENSIONS	11

SAFETY

- A qualified electrician should install this mirror.
- This fitting is only suitable for connection to a 220-240V earthed supply in accordance with current IEE wiring regulations and should be installed in accordance with local Building Regulations.
- This is for domestic, indoor use only.
- The fitting should be connected to a dedicated lighting circuit, which must be protected by a 5-amp fuse (or a 6-amp miniature circuit breaker).
- Before installing the fitting, ensure the mains supply is switched off and that the appropriate fuse is removed (or the appropriate circuit breaker is switched off) before commencing installation. Ensure that measures are taken to prevent the supply from being inadvertently reconnected.
- If there is a “Minimum Distance” Label, please do not allow Flammable Materials to rest within that distance from the unit.
- This product may contain delicate parts – be careful during handling and maintenance to avoid breakage.
- Any modification to the fitting will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause electric shock. Never switch on a defective or damaged appliance. Disconnect the appliance from the mains before seeking assistance.
- This product is IP44 rated, and no part of the installation is allowed to be within bathroom Zones 0 or 1. Installation is permitted within Zone 2.
- This product must be earthed. Before commencing installation, ensure that there are no pipes or wires located behind the wall that may be damaged during drilling.
- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
- Check that the mirror is not damaged prior to installation.
- Take care of unpacking, and do not use a sharp blade to open it as this may damage the mirror and void your warranty.
- Installation must only be carried out by a qualified professional or electrician.
- Once installed, silicon can be applied between the cabinet and the wall around the unit. Don't seal the bottom of the cabinet, as this may allow water to accumulate behind it.


- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similarly qualified person in order to avoid a hazard.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced.
- To reduce the risk of strangulation, the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.

BATHROOM ZONES

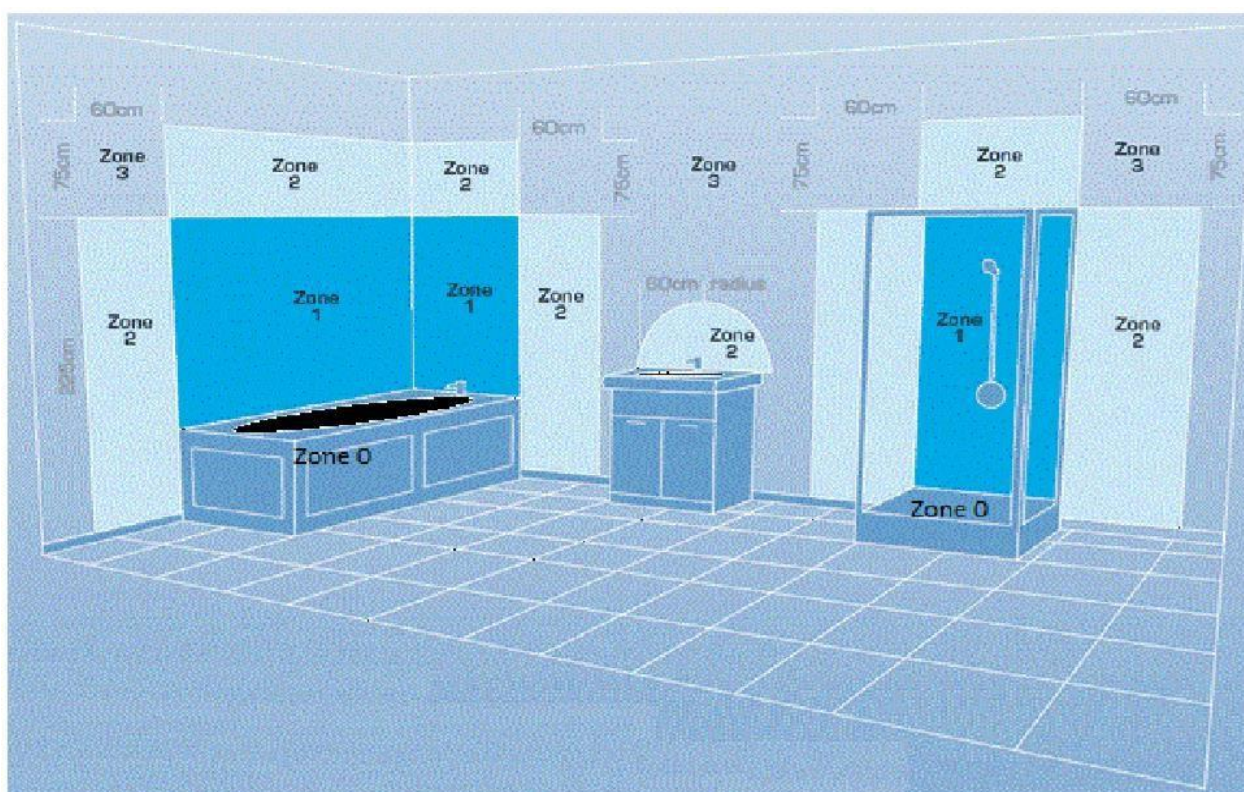


Zone 0:	The interior of the bathtub or shower basin.
Zone 1:	The area around the bathtub or shower basin up to a height of 2.25m above the floor
Zone 2:	The area stretching to 0.6m outside the bath or shower and above the bath or shower if over 2.25m


PARTS SUPPLIED



WALL PLUGS (X4)
5mm




SCREWS M4 (X4)
45mm




HANGING BAR (X1)

NOTE: It is the installers responsibility to ensure that the fittings are suitable for the type of wall. Alternative fittings may be required (Not Supplied). If unsure professional advice should be sought.


TOOLS REQUIRED




TAPE MEASURE




SPIRIT LEVEL




ELECTRIC DRILL




SCREWDRIVER



HAMMER




8mm DRILL BIT



PENCIL

PRODUCT OVERVIEW

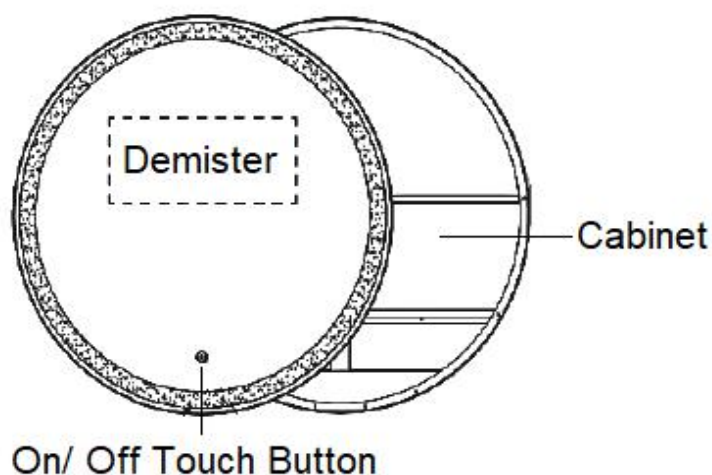

INSTALLATION

IMPORTANT: Before commencing installation, ensure that there are no pipes or wires located behind the wall that you will be drilling into. The depth of the holes needed for hanging are approximately 50mm.

- Please ensure that a minimum clearance of 223 mm is left on the side of the opening to allow the sliding door to open fully after installation. This space is essential for smooth and unobstructed operation of the door.
- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage in the wall due to incorrect positioning.
- Check there the mirror is not damaged prior to installation.
- Take care unpacking, do not use a sharp blade to open as this may damage the mirror and void your warranty.


NOTE: The maximum safe loading weight for the unit is 10.5kg.

NOTE: The maximum safe loading weight for each shelf is 3.5kg.

The cabinet is supplied with a hanging bar to mount the cabinet onto the wall. At the back of the cabinet there is a corresponding bar which is designed to slot onto the hanging bar.


- 1 Choose the desired position for the cabinet, and based on that, determine the required position of the hanging bar.

- 2 Use a pencil to mark the positions of the three holes on the wall.

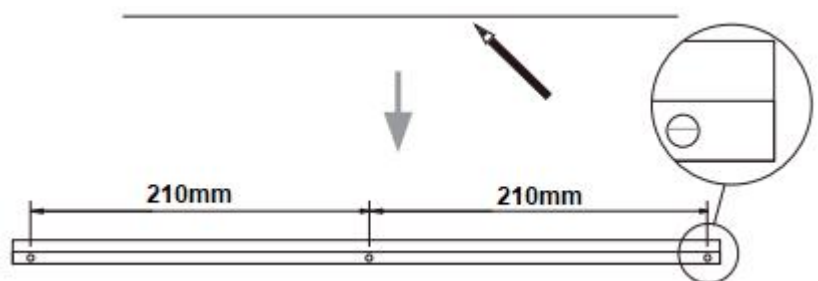

- 3 Hold the hanging bar in position and use a spirit level to ensure it is level.
- 4 Set the hanging bar aside and drill the holes using a suitable drill bit.
- 5 Insert wall plugs into the holes, making sure they are flush with the wall.
- 6 Position the hanging bar on the wall, aligning the three holes with the wall plugs.


7

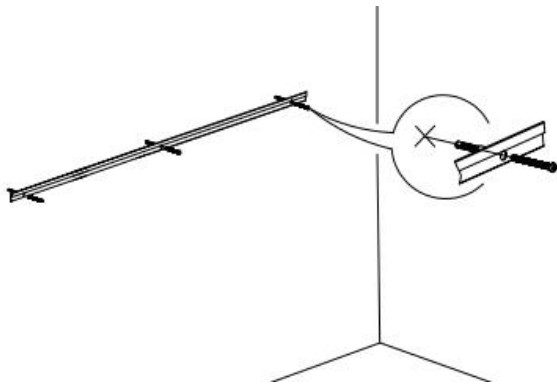


Secure the hanging bar to the wall using the supplied screws.

8

You can now hang the cabinet. Carefully lower the cabinet onto the hanging bar, ensuring it is secure and will not slide.

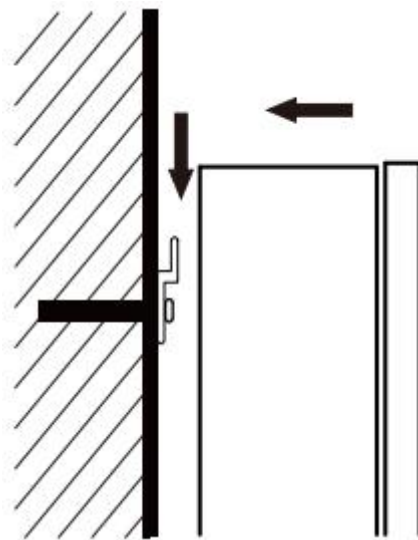

9

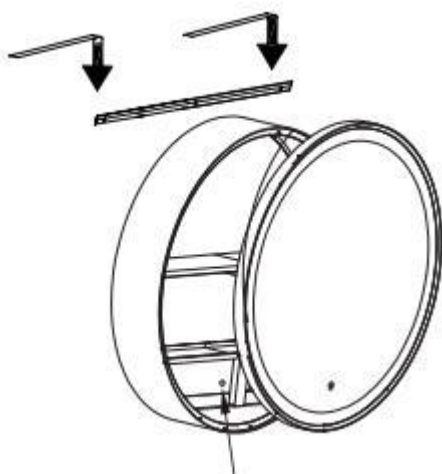


Open the cabinet door and mark the wall with a pencil through the security hole on the back panel.

- 10** Remove the cabinet, drill the hole then place a wall plug into the hole you have just drilled.




- 11** Hang your cabinet back up onto the hanging bar and ensure that the security hole in the cabinet is lined up with the wall plug.

12

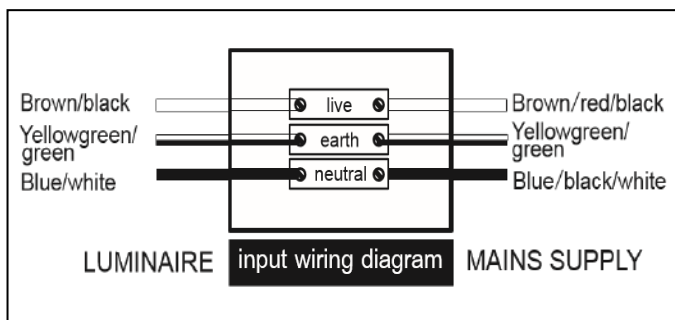

The cabinet should now be connected to a suitable fused spur following current regulations and guidance. We would advise this to be situated directly behind the cabinet below the hanging bar. When connecting ensure that enough cable is left to allow the cabinet to be safely removed from the hanging bar.

- 13** Secure the cabinet to the wall using a screw through the security hole and into the wall plug you previously installed.

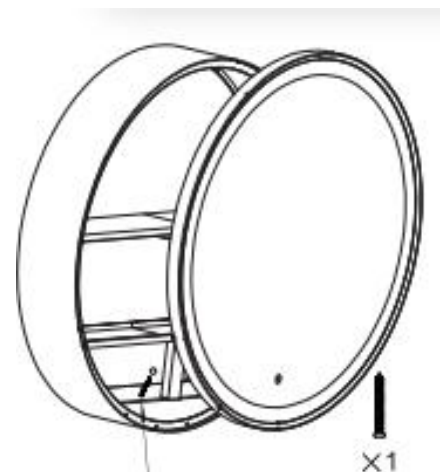

OPERATION

Your mirror has a touch switch towards the base of the mirror. Tap it once to turn on the lights and the demister. Tap again to turn off the lights and demister.

Hold down the button to change the lights from warm white to cool white and back again.



CLEANING AND MAINTENANCE

Never use products containing bleach or abrasive cleaners, as this will have a detrimental effect on the appearance and lifespan of the product.

Use a clean microfibre cloth to clean the mirror.

TECHNICAL SPECIFICATION

Model	ELARA600A ELARABB600A
WxHxD (mm)	608x608x155
Net Weight (Kg)	10.1
Power Cord length (cm)	62
Rated Power (W)	22W
IP Rating	IP 44
Input	220 V-240 V 50 Hz

This product contains a light source of energy efficiency class F.

DISPOSAL

Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.

Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please contact the local council for details of your local household waste recycling centers.



At the time of printing the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer the regulations are monitored to ensure continued compliance. Further information can be provided upon request.

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better
bathrooms**

Part of the BuyItDirect Group

