

FLT SQSHCDIV C

FLUTE Shower Range

Flute Concealed Single Control Chrome Shower valve with Diverter and Rigid Riser Kit



Specification

Style:	Contemporary
Main Construction Material:	Brass & Plastic
No of Controls:	1
Shower Type:	Exposed
Shower Head Type:	Both
Valve/Cartridge Type:	Sequential
Maximum Hot Water Supply Temperature °C:	65
Dynamic Pressure Range: (bar)	5
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable For All Plumbing Conditions
Working Pressure Range:	Min: 0.2 Max: 5.0
Flow Rate: (l/min @ 3 bar)	9.9
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No

Features:


- Shower kit contains external diverter, shower rose, rigid riser and rub clean handset
- Rub clean, push button multi function handset
- Factory fitted flow regulators means this is a water saving shower

Product Certifications:



9.9 L/Min

Dimensions (measurements in mm)

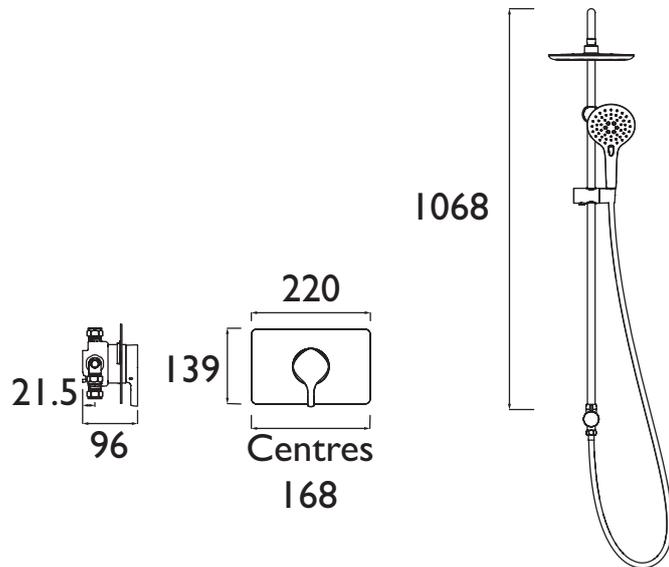

For more products, visit our website:
<http://www.bristan.com>



Flow Rates (l/min)

System Pressure (bar)	1	2	3	4	5
Through Rose (with flow regulators)	5.5	8	9.9	11.4	12.2
Through Rose (without flow regulators)	5.6	8.3	10.3	11.8	13.5
Through Handset (mixed with flow regulators)	4.9	7.1	8.7	10	11.1
Through Handset (mixed without flow regulators)	5	7.2	8.7	10	11.3

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D4