


USER MANUAL



Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

better 
bathrooms

LED Corner Mirror Cabinet 300x600mm - Lykos

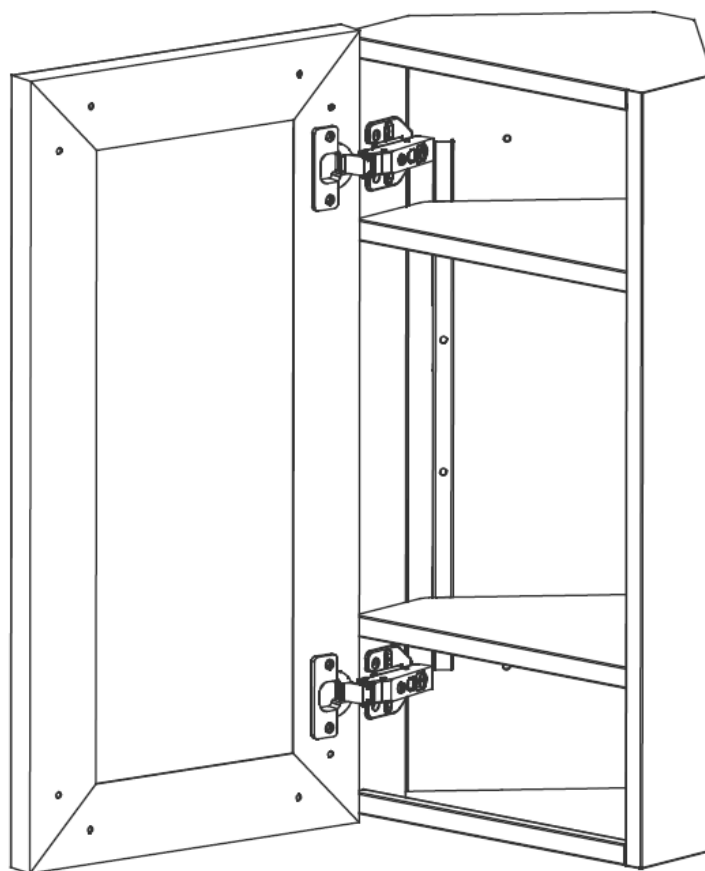

LYKOSMB600 (Matt Black)

LYKOSBB600 (Brushed Brass)

- TOUCH SENSOR CONTROL
- SOFT-CLOSE DOORS
- IP44 INGRESS PROTECTION

CONGRATULATIONS ON YOUR PURCHASE

Our aim at Better Bathrooms is to bring you extraordinary bathroom products for less.

If you're after a modern, traditional, or totally unique bathroom style, we have the fittings and fixtures to bring your ideas to life so you can fall in love with your space every day.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- Log in to your account and contact our customer services team via your self-service portal – betterbathrooms.com/CustomerAccount/Login
- Contact us via betterbathrooms.com/contact/contact-us


CONTENTS

SAFETY	3
BATHROOM ZONES	4
PARTS SUPPLIED	5
TOOLS REQUIRED	5
INSTALLATION DIMENSIONS	6
INSTALLING THE CABINET	7
DOOR ADJUSTMENT	8
SHELF ADJUSTMENT	8
OPERATION	9
CLEANING AND MAINTENANCE	9
TECHNICAL SPECIFICATIONS	9

SAFETY


- This cabinet should be installed by a qualified electrician.
- This fitting is only suitable for connection to a 220- 240V~ earthed supply in accordance with current IEE wiring regulations and should be installed in accordance with local Building Regulations.
- This is for domestic, indoor use only.
- The fitting should be connected to a dedicated lighting circuit, which must be protected by a 5-amp fuse (or a 6-amp miniature circuit breaker).
- The electrical connection must be an adequate distance from the rear of the cabinet to prevent the risk of shorting with the cabinet's casing.
- Before installing the fitting, ensure the mains supply is switched off and that the appropriate fuse is removed (or the appropriate circuit breaker is switched off) before commencing installation. Ensure that measures are taken to prevent the supply from being inadvertently reconnected.
- If there is a "Minimum Distance" Label, please do not allow Flammable Materials to rest within that distance from the unit.
- This product may contain delicate parts – be careful during handling and maintenance to avoid breakage.
- Any modification to the fitting will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause an electric shock. Never switch on a defective or damaged appliance. Disconnect the appliance from the mains before seeking assistance.
- This product is IP44 rated, and no part of the installation is allowed to be within bathroom Zones 0 or 1. Installation is permitted within Zone 2.
- This product must be earthed. Before commencing installation, ensure that there are no pipes or wires located behind the wall that may be damaged during drilling.
- To reduce the risk of strangulation, the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
- If the external flexible cable connected to this luminaire exceeds 30 cm in length and is within arm's reach, it must be securely fixed to the wall to reduce the risk of strangulation.
- Ensure that the installation location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
- Inspect the cabinet to ensure there are no signs of damage prior to installation.
- Take care of unpacking, and do not use a sharp blade to open it, as this may damage the mirror and void your warranty.
- Installation must only be carried out by a qualified professional or electrician.
- Once installed, silicone can be applied between the cabinet and the wall around the unit. Don't seal the bottom of the cabinet, as this may allow water to accumulate behind it.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer, his service agent or a similarly qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

BATHROOM ZONES

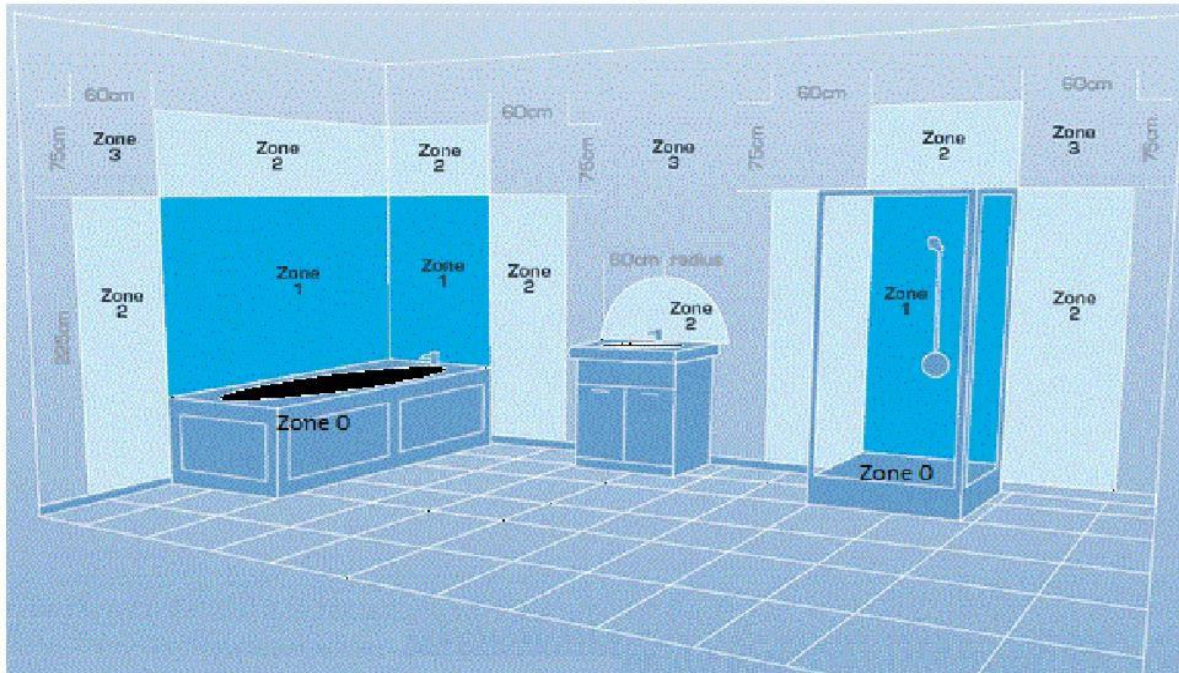


Zone 0:	The interior of the bathtub or shower basin.
Zone 1:	The area around the bathtub or shower basin up to a height of 2.25m above the floor
Zone 2:	The area stretching to 0.6m outside the bath or shower and above the bath or shower if over 2.25m


PARTS SUPPLIED

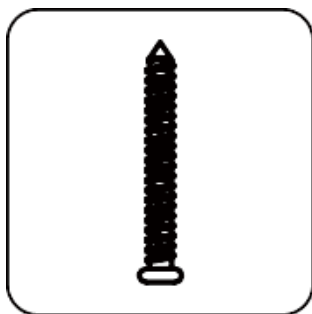

M5 Screw (x4)

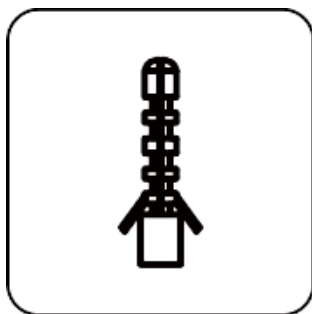


Wall Plugs (x4)

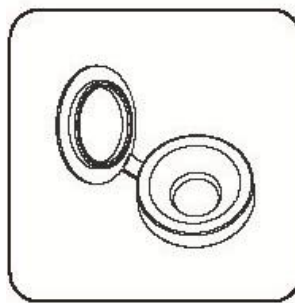


Screw Cap for Security Hole (x1)

PLEASE NOTE: It is the installer's responsibility to ensure that the fittings are suitable for the type of wall. Alternative fittings may be required (Not Supplied). If unsure, professional advice should be sought.


TOOLS REQUIRED




TAPE MEASURE




SPIRIT LEVEL




ELECTRIC DRILL




SCREWDRIVER



HAMMER




8mm DRILL BIT



PENCIL

INSTALLATION DIMENSIONS

NOTE: All diagrams are for illustrational purposes. All dimensions are in mm.

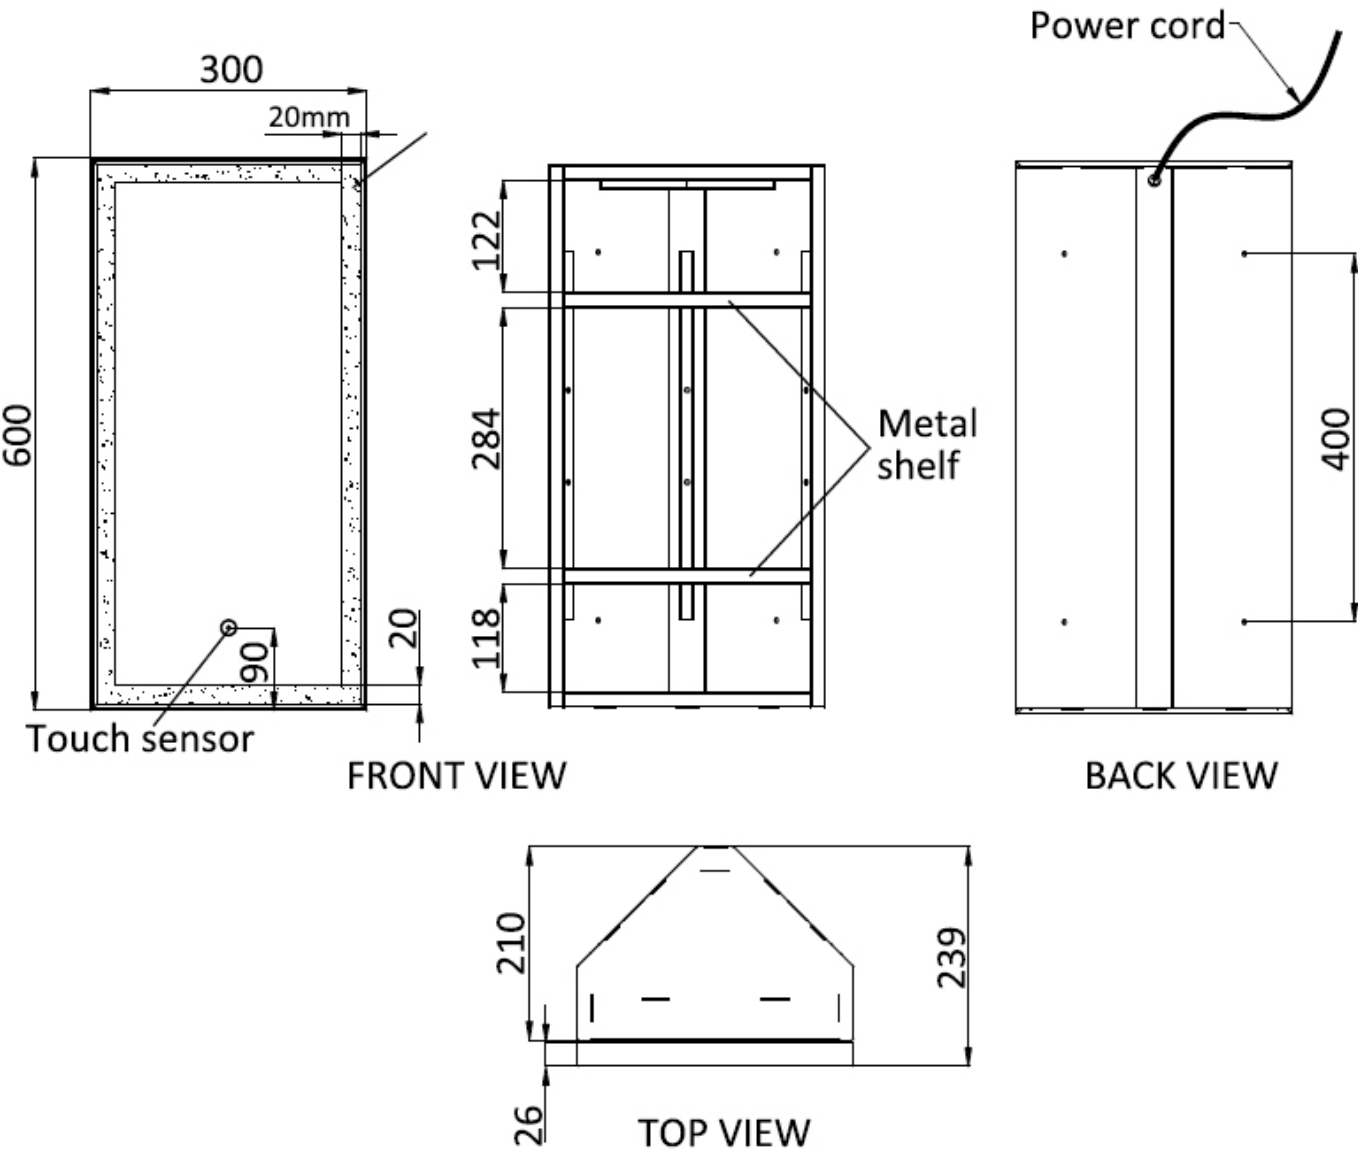


INSTALLATION


The cabinet is designed to be wall-mounted using the supplied M5 screws and wall plugs. Inside the cabinet, there are corresponding screw holes that will fit it securely into the drilled wall holes.

IMPORTANT: Always check for pipes, wiring, or other utilities before drilling.

1. Choose and confirm the desired location for the cabinet installation.
2. Hold the cabinet in place. Use a spirit level to ensure this is level.
3. Use a pencil to mark the position of the four fixing holes on the wall.
4. Mark the approximate location of the rear cable entry to help plan the fused spur connection point.
5. Remove the cabinet and drill the fixing holes using a suitable drill bit.
6. Insert four wall plugs into the drilled holes, ensuring they are flush with the wall.
7. Connect the electrical cable at the rear of the cabinet to a suitable fused spur, in accordance with current UK wiring regulations. Ensure the electrical connection point is positioned to align with the rear cable exit and leave enough cable slack to allow the cabinet to be safely removed during future maintenance or servicing.

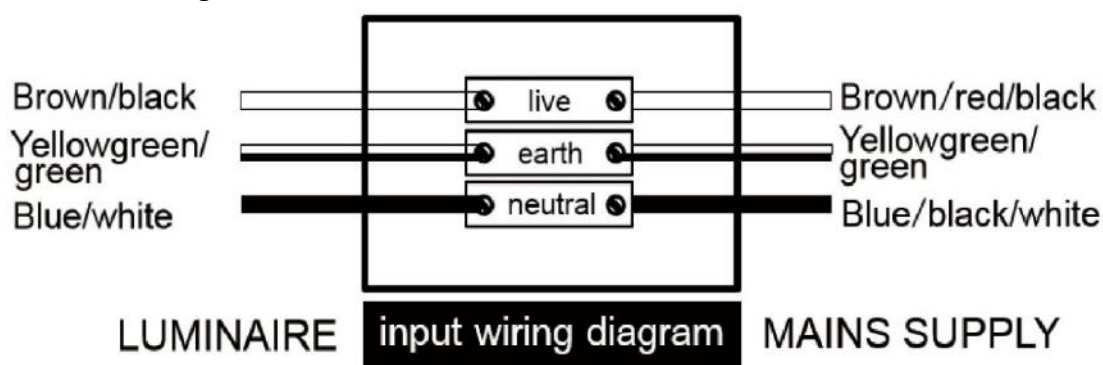


8. Mount the cabinet onto the wall, aligning the fixing holes with the wall plugs.
9. Secure the cabinet using four of the supplied screws.
10. Secure the unit with a screw through the security hole then screw the cap onto the hole.

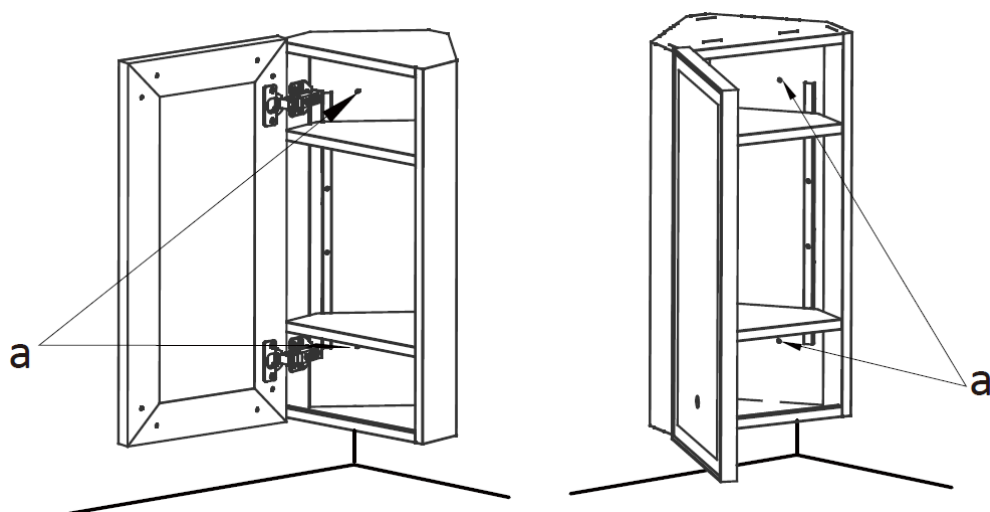


DOOR ADJUSTMENT

If the door is not level, you can adjust it using the hinge screw.

Turning the screw clockwise will push the door right, and turning anticlockwise will pull it right.

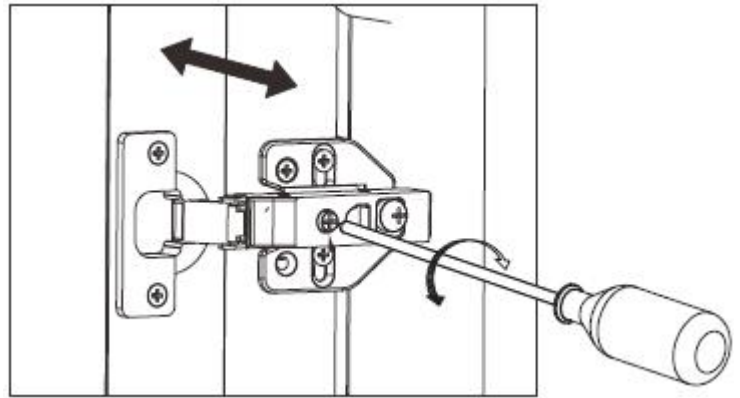

SHELF ADJUSTMENT

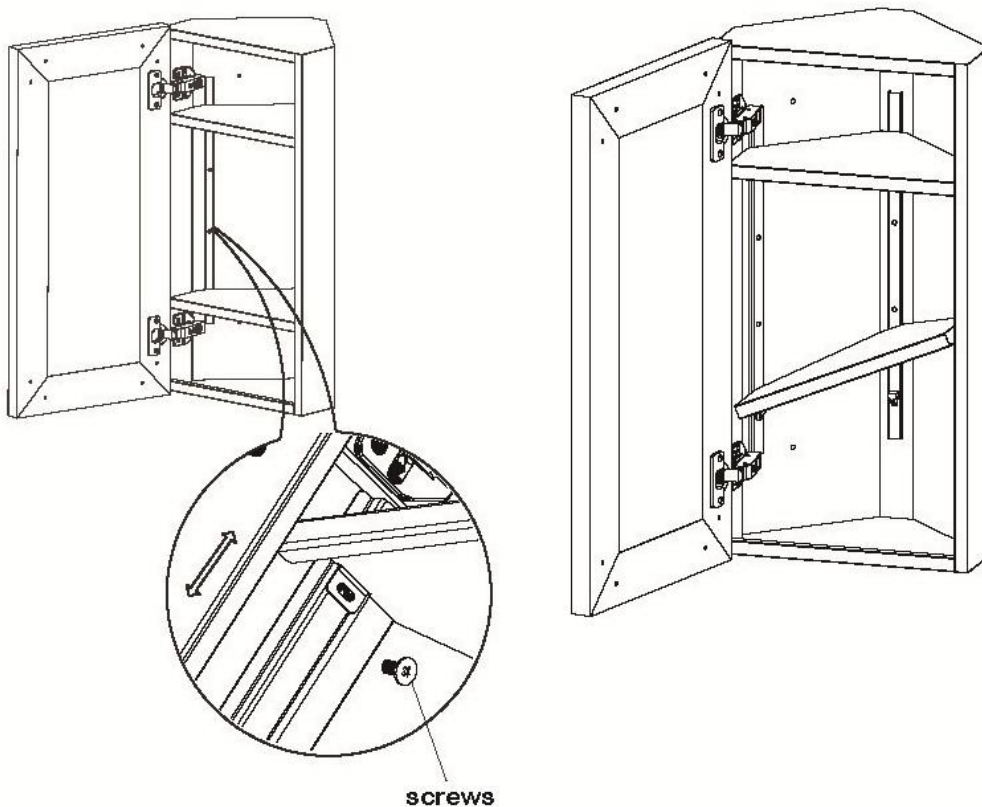


Multiple holes on both sides of the cabinets allow you to change the height of your shelves.

To adjust the shelf position:

1. Remove the shelves and the three screws holding it.
2. Select your desired shelf height from the available holes.
3. Re-insert the screws into your desired position, then tighten them and fix the shelf in place.

OPERATION

To operate the mirror, use the touch switch located at the bottom center of the front panel. Tap the switch once to turn on the lights. To change the light from Cool White to Warm White, touch and hold the switch. Tap the switch again to turn the lights off.



CLEANING AND MAINTENANCE


Never use products containing bleach or abrasive cleaners, as this will harm the product's appearance and lifespan.

Use a clean microfibre cloth to clean the mirror.

TECHNICAL SPECIFICATION

Model	LYKOSMB600 LYKOSBB600
WxHxD (mm)	600 x 300x 240
Net Weight (Kg)	6.4
Power Cord length (cm)	63
Rated Power (W)	14W
IP Rating	IP44
Input	220-240V~ 50 Hz

This product contains a light source of energy efficiency class F and must only be replaced by a professional or similarly qualified person.



DISPOSAL

Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.

Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please get in touch with the local council for details of your local household waste recycling centres.



At the time of printing the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation, the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer, we monitor the regulations to ensure continued compliance. Further information can be provided upon request.

For more information

- visit betterbathrooms.com
- email support@betterbathrooms.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA