

USER MANUAL




Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

**better
bathrooms**

Product name: Fluted Unit With Sintered Stone Worktop

Product codes: /MATIWC/MATI1150WTLH/

MATI640FS/MATI1150WTRH

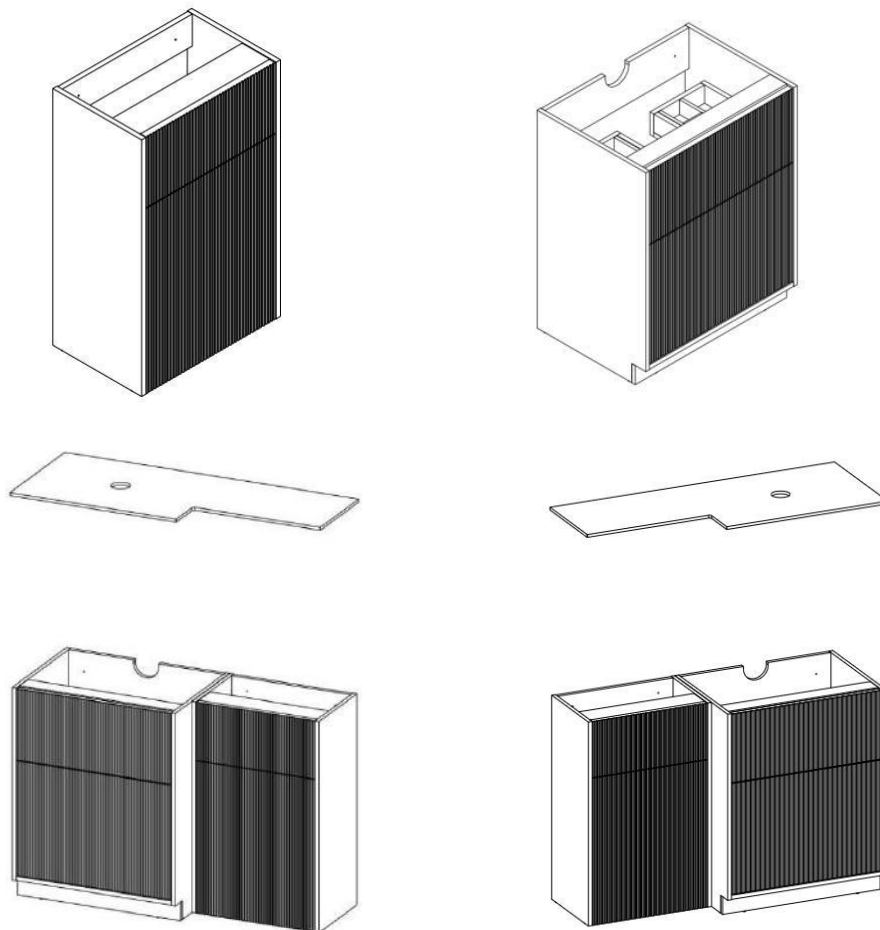

- **Multi-person assembly**
- **Tools required**
- **We always recommend using professional tradespeople to install your product**

V1_2025.04.09

Congratulations on your purchase

And welcome to our growing gang of savvy shoppers

We're on a mission to bring you extraordinary bathroom products, for less. From modern to traditional style ceramics, plus the gorgeous fixtures, fittings and furniture to match. So, you can fall in love with your space every single day.

As one of the UK's largest independent bathroom stores, we've received countless awards; including the National Business Awards UK, the Digital Entrepreneur Awards and being placed on The Sunday Times Fast Track 100.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- log in to your account and contact our customer services team via your self-serve portal – betterbathrooms.com/CustomerAccount/Login
- contact us via betterbathrooms.com/content/contact-us

Important information

- Please read these instructions thoroughly and retain for future reference
- Always check for pipes and cables before drilling
- Wipe the product clean and dry regularly, especially when the product is subject to steam or splashes.

Contents

Product	Description	Qty	Description	Qty	Description	Qty	Description	Qty	Description	Qty
MATIWC	Wall Screw	2	Wall Plug	2	Brass washer	2	Screw cap	2	Plastic washer	2
MATI640FS	Wall Plug	2	Wall Screw	2	Plastic washer	2	Brass washer	2	Screw cap	2
MATI1150WTLH	/	/	/	/	/	/	/	/	/	/
MATI1150WTRH	/	/	/	/	/	/	/	/	/	/

Maximum loading

- Please noted the maximum loading for unit is 100kgs(Including top/basin weight).
- Please noted the maximum loading for each drawer is 20kgs.

Parts / Diagrams



Wall plug



Wall screw



Plastic washer



Brass washer



Screw cap

Tools required



Spirit Level



Electric drill



Drill bit
($\Phi 8$)



Tape measure
(3m~5m)



Silicone



Pencil



Screwdriver

Cabinet installation:

The room in which the unit is being installed, must be well ventilated.








Please check for pipes and cables prior to drilling, after the position of the brackets is marked, drill the holes in the wall, using an 8mm drill bit(not supplied), to a depth of approx 50mm.

Insert the wall plugs and tap flush with the wall surface and secure the wall brackets into place.

Check the brackets fitted to the unit are fully tightened.

Floor Standing Installation:

Units must be secured to the wall

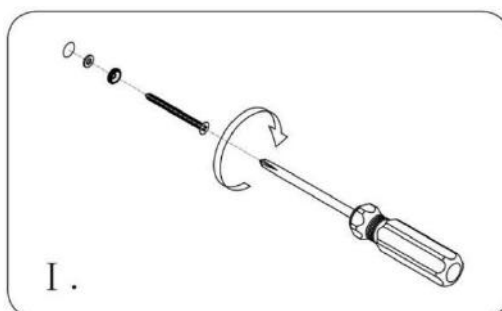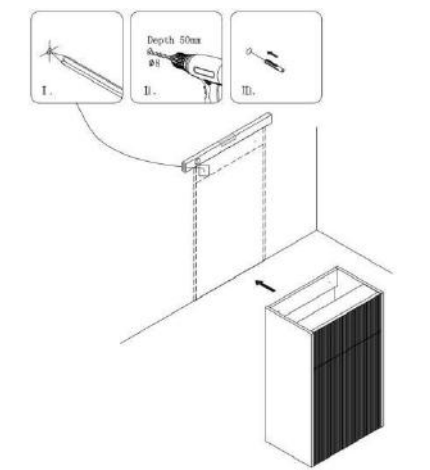


Countertop installation:

Please note for a countertop installation, the basin hole has been drilled and there is no tap hole. Before installing the countertop, confirm your selected basin will fit countertop. If you need to match a tap, please drill a tap hole according to your tap and the drilled edge must be sealed.

After the basin hole and tap hole are confirmed, the countertop can be fitted to the unit, by applying a bead of silicone between the unit and countertop to provide a seal and fixing for countertop to the unit.

Also run a bead of silicone along the back edge of the base where it meets the wall.

After silicone has been applied, this must be left for 24 hours to dry.

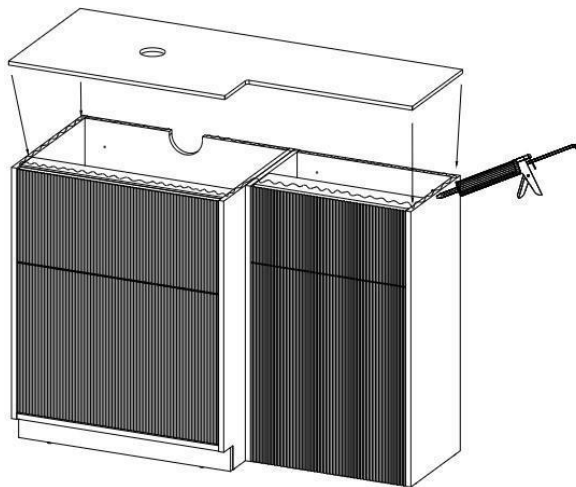

Tap hole drilling:

If want to drill the tap hole, please see below operation methods:

Use Specialized Tools (Diamond drill bits) and Cooling Systems (Coolant Liquid or Water).

Use a drill with speed control function and Carbide or Emery drill bits/hole cutters (Impact mode must be disabled).


Recommended to use a round drill with matching diameter.

The edge of the hole is $\geq 5\text{cm}$ from the edge of the countertop.


Note:

A qualified installer is recommended to carry out the cutting of the top when and if necessary, no return will be accepted for damage caused during cutting, if the process is not followed in full.


Troubleshooting: DRAWER REMOVAL & INSTALLATION

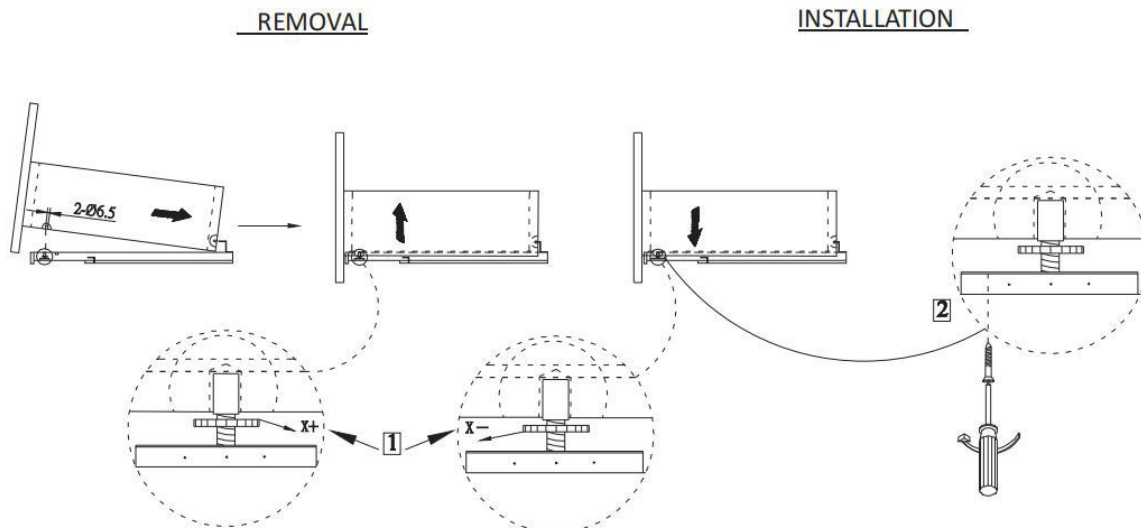

DRAWER ADJUSTMENT & CAUTIONS

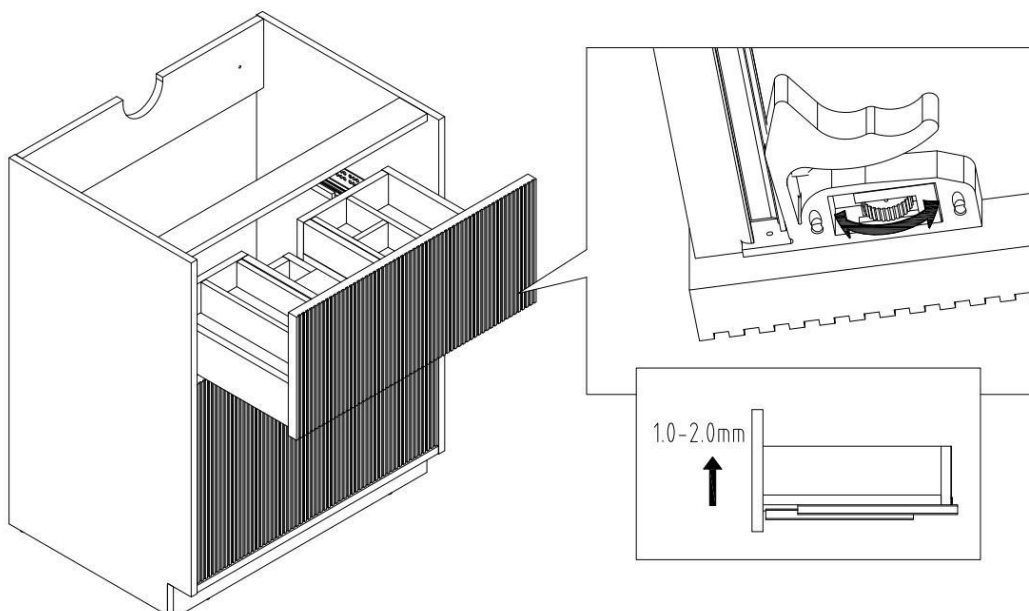

This product is PUSH TO OPEN, you must press the drawer in the areas indicated below to ensure correct opening/operation and prevent damage to the mechanism.

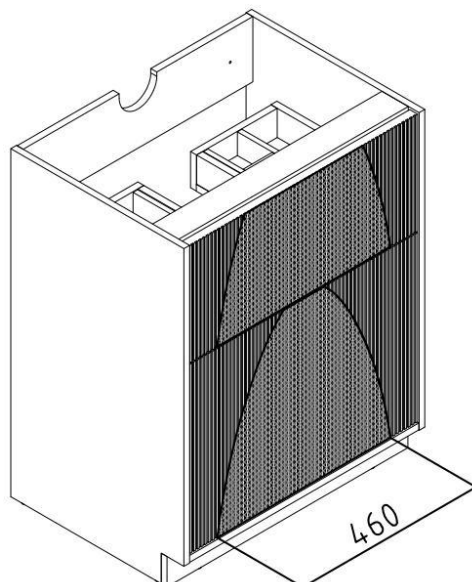

Maintenance and Cleaning

Wipe the product clean and dry regularly, especially when the product is subject to steam or splashes.

Do not use harsh chemicals or materials on the product, as this will damage the product and invalidate your guarantee.

To clean and maintain the product, wipe using a clean damp cloth and wipe dry with a soft cloth.

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better
bathrooms**

Part of the BuyItDirect Group