



Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

Triple Door Beige Fluted Mirrored Bathroom Cabinet with Lights 1200 x 700mm - Sidra

Double Door Beige Fluted Mirrored Bathroom Cabinet with Lights 780 x 700mm - Sidra

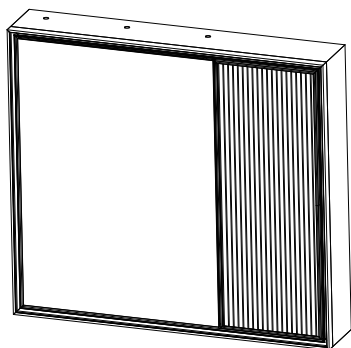

SIDBF780

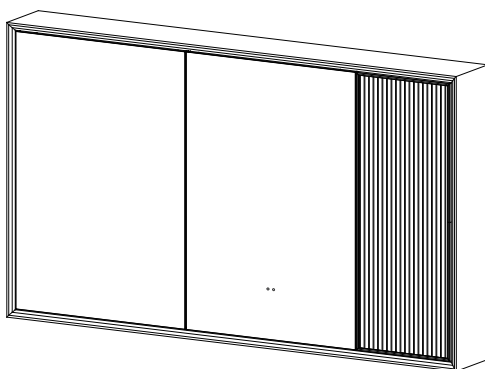

SIDBF1200

- INFRARED SENSOR
- DEMISTER
- IP44 INGRESS PROTECTION
- ALUMINIUM ALLOY
- WALL MOUNT

CONGRATULATIONS ON YOUR PURCHASE

Our aim at Better Bathrooms is to bring you extraordinary bathroom products for less.

If you're after a modern, traditional, or totally unique bathroom style, we have the fittings and fixtures to bring your ideas to life so you can fall in love with your space every day.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- Log in to your account and contact our customer services team via your self-service portal – betterbathrooms.com/Account/Login
- Contact us via betterbathrooms.com/contact/contact-us

CONTENTS

SAFETY INFORMATION	3
BATHROOM ZONES	4
PARTS LIST	5
TOOLS REQUIRED	5
DIMENSIONS	6
INSTALLATION	8
DOOR ADJUSTMENT	10
OPERATION	11
CLEANING AND MAINTENANCE	11
TECHNICAL SPECIFICATIONS	11

SAFETY INSTRUCTIONS

IMPORTANT: Carefully read the instructions before operating the unit. Retain for future reference and pass along with the appliance to any third party.

- This mirror should be installed by a qualified electrician.
- This fitting is only suitable for connection to a 220-240V earthed supply in accordance with current IEE wiring regulations and should be installed in accordance with local Building Regulations.
- This is for domestic, indoor use only.
- The fitting should be connected to a dedicated lighting circuit, which must be protected by a 5-amp fuse (or a 6-amp miniature circuit breaker).


Before installing the fitting, ensure the mains supply is switched off, and that the appropriate fuse is removed (or the appropriate circuit breaker is switched off) before commencing installation. Ensure that measures are taken to prevent the supply from being inadvertently reconnected.

- If there is a "Minimum Distance" Label, please do not allow Flammable Materials to rest within that distance from the unit.
- This product may contain delicate parts - be careful during handling and maintenance to avoid breakage.
- If any modification is made to the fitting, it will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause an electric shock. Never switch on a defective or damaged appliance. Disconnect the appliance from the mains before seeking assistance.
- This product is IP44 rated, and no part of the installation is allowed to be within bathroom Zones O or 1. Installation is permitted within Zone 2.
- This product must be earthed. Before commencing installation, ensure that there are no pipes or wires located behind the wall that may be damaged during drilling.
- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
- Check that the mirror is not damaged prior to installation.
Take care unpacking, do not use a sharp blade to open as this may damage the mirror and void your warranty.
- Installation must only be carried out by a qualified professional or electrician.
- Once installed, silicon can be applied between the cabinet and the wall around the unit. Don't seal the bottom of the cabinet, as this may allow for water to accumulate behind the cabinet.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

Illustrations in this manual may differ from the final product; this is due to constant product development and improvement. There may also be slight variations between the different models covered in this manual.


BATHROOM ZONES

If the appliance is to be fitted within a bathroom, a good understanding of the zoning within bathrooms is required to ensure the unit is mounted in a safe position. The appliance is rated as IPX4 and should be installed outside of Zones 0 -2. We would advise that when the unit is fitted within a bathroom, the plug is removed from the unit, and a suitable fused spur is installed in accordance with BS 7671. In addition, when used in a bathroom, it must be protected by a suitable RCD to prevent the risk of electric shock, and it must not be immersed in water during cleaning.

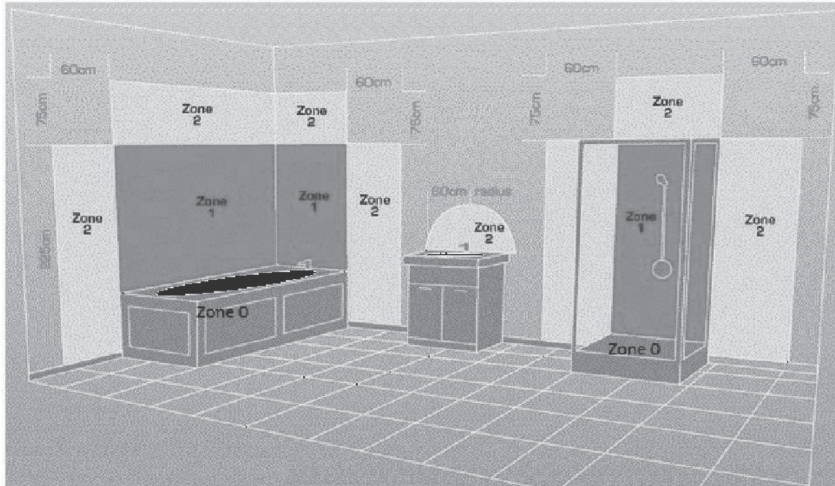


Zone 0:	The interior of the bathtub or shower basin.
Zone 1:	The area around the bathtub or shower basin up to a height of 2.25m above the floor.
Zone 2:	The area stretching to 0.6m outside the bath or shower and above the bath or shower if over 2.25m.


PARTS SUPPLIED




Wall Plugs
SIDBF780: X5
SIDBF12100: X7



SCREWS M5
SIDBF780: X5
SIDBF12100: X7




ALUMINIUM
ALLOY (X1)




SECURITY BRACKET
(X1)

PLEASE NOTE: It is the installer's responsibility to ensure that the fittings are suitable for the type of wall. The provided parts are only suitable for masonry walls. Alternative fittings may be required (Not Supplied). If unsure, seek professional advice.


TOOLS REQUIRED




TAPE MEASURE




SPIRIT LEVEL




ELECTRIC DRILL




SCREWDRIVER



HAMMER



8mm DRILL BIT




PENCIL


IMPORTANT: Before drilling, ensure the wall on which you are mounting the appliance is free of pipes and wires.

DIMENSIONS

SIDBF780

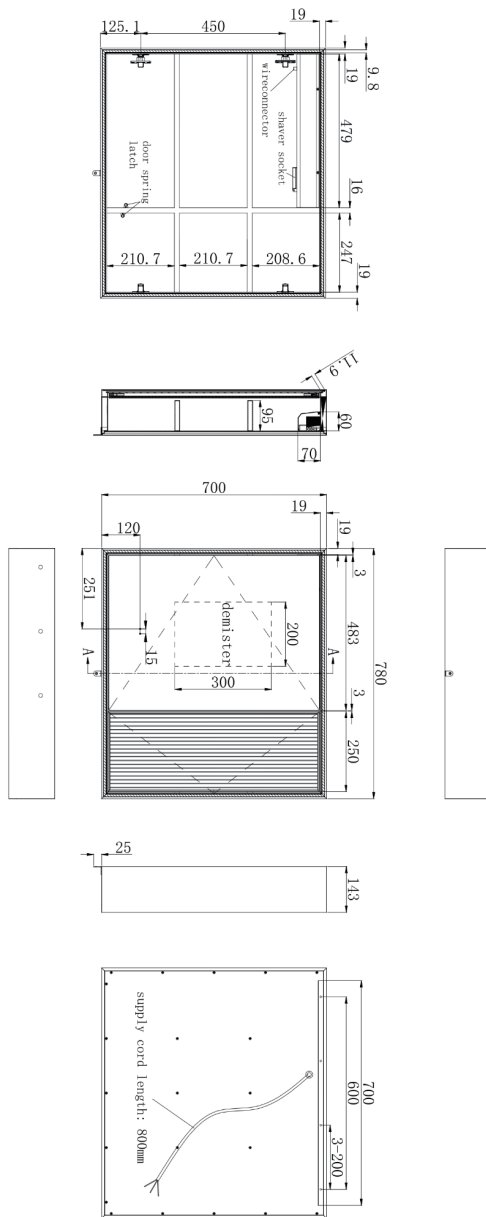

SIDBF1200

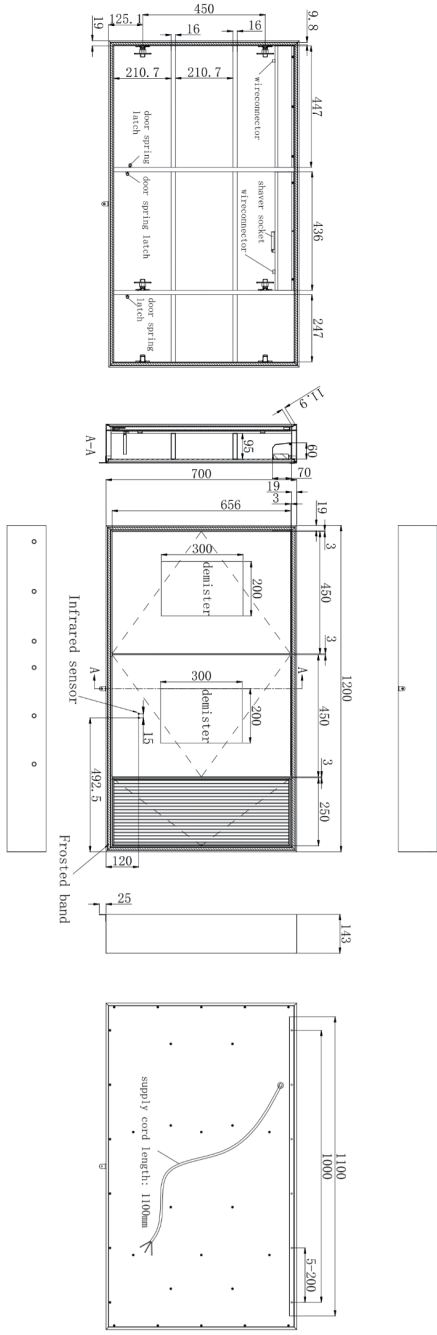

INSTALLATION


IMPORTANT:

Before commencing installation, ensure that there are no pipes or wires located behind the wall that you will be drilling into. The depth of the holes needed for hanging is approximately 50mm.


- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
 - Check that the mirror is not damaged before installation.
 - Take care unpacking, do not use a sharp blade to open as this may damage the mirror and void your warranty.
 - Ensure that the power is disconnected at the circuit breaker, and that there is no risk of reconnection during installation.
1. Choose the desired position of the cabinet, and from that determine the required position of the hanging brackets.
 2. Hold the hanging bar in position, using a spirit level to ensure it is level.
 3. Use a pencil to mark the position of the holes on the wall.
 4. Place the hanging bar to one side and drill the holes with a suitable drill bit.
 5. Insert wall plugs into the holes, ensuring they are flush to the wall.
 6. Place the hanging bar onto the wall, lining up the holes with the wall plugs.
 7. Secure the hanging bar to the wall using the supplied screws.




8. Install the security bracket on the bottom of the cabinet with a security screw.




9. You will now be able to hang the cabinet. Carefully lower the cabinet onto the hanging bar, ensuring that it is secure and will not slide.




10. Mark the wall with a pencil through the security hole on the bottom of the cabinet.

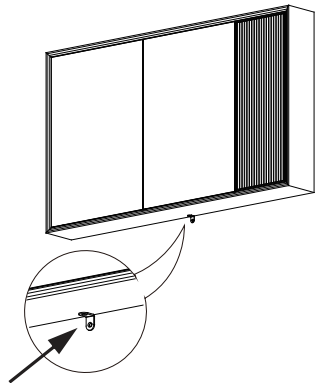


11. Remove the cabinet, drill the hole, then place a wall plug into the hole you have just drilled.



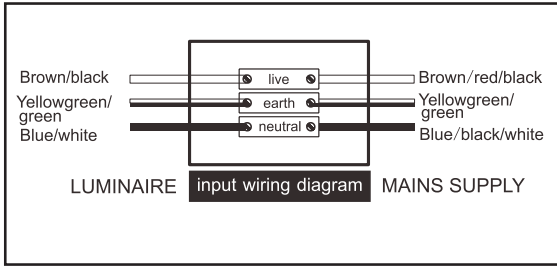

12. The cabinet should now be connected to a suitable fuse spur following current regulations and guidance. When connecting, ensure there is enough cable left to remove the cabinet safely.


13. You will now be able to hang the cabinet. Carefully lower the cabinet onto the screws, ensuring that it is secure and will not slide
14. Secure the cabinet to the wall using a screw through the security hole.

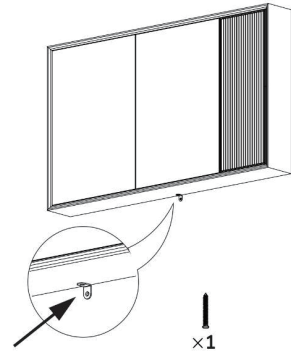

15. Reconnect the power supply.

DOOR ADJUSTMENT

If the door is not level, you can adjust it using the hinge screw. Turning the screw clockwise will push the door to the right, and turning it anticlockwise will pull it to the right.

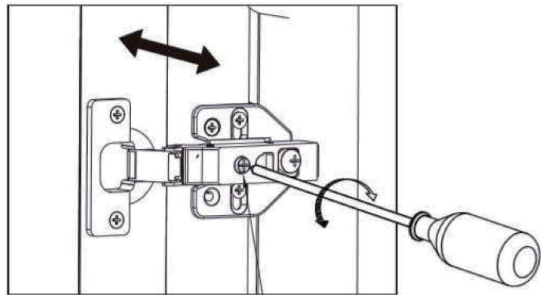


OPERATION

Turning On/Off & Color Temperature Control:

Wave your hand across the sensor on the front of the mirror, approximately 5 cm away, to operate the light and demisting pad:

- 1st wave: Turns on the light (defaulting to the first color temperature) and activates the demisting pad.
- 2nd wave: Switches to the second color temperature.
- 3rd wave: Switches to the third color temperature.
- 4th wave: Turns off the light and demisting pad completely.



Infrared switch on the Mirror

Note: To turn off the light, you must cycle through all color temperature modes first. The demisting pad is active only when the mirror light is on.

SHAVER SOCKET

SHAVERS Your cabinet comes with an in-built shaver socket located inside the unit. This socket is designed only for use with shavers and other low-voltage items powered from a shaver socket.



Once the cabinet is connected to the mains, the shaver socket is ready to use.

ONLY

CLEANING AND MAINTENANCE


Never use products containing bleach or abrasive cleaners, as this will harm the product's appearance and lifespan.

Use a clean microfibre cloth to clean the mirror.

TECHNICAL SPECIFICATION

Model	SIDBF780	SIDBF1200
WxHxD (mm)	780*700*143	1200*700*143
Net Weight (Kg)	15.5	23.8
Power Cord length (cm)	80	110
Rated Power (W)	26	39
IP Rating	IP44	IP44
Input	220 V-240 V 50 Hz	220 V-240 V 50 Hz

This product contains a light source of energy efficiency class F and must only be replaced by the manufacturer, its service agent or a similarly qualified person.



DISPOSAL

Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.

Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please get in touch with the local council for details of your local household waste recycling centres.

At the time of printing the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation, the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer, we monitor the regulations to ensure continued compliance. Further information can be provided upon request.



For more information

- visit betterbathrooms.com
- email Support@Betterbathrooms.com
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better
bathrooms**

Part of the BuyItDirect Group