




Quality Bathroom Products

Figure 1



All installations must comply with guidelines which are based on a zonal concept. The diagram to the left illustrates this concept and must be followed to ensure the safe installation of bathroom lighting. These regulations apply to domestic installations only. Installations must be made in accordance with the current IEE wiring regulations and relevant building regulations. HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician.

This product is suitable for installation in zones: **2** **0z**

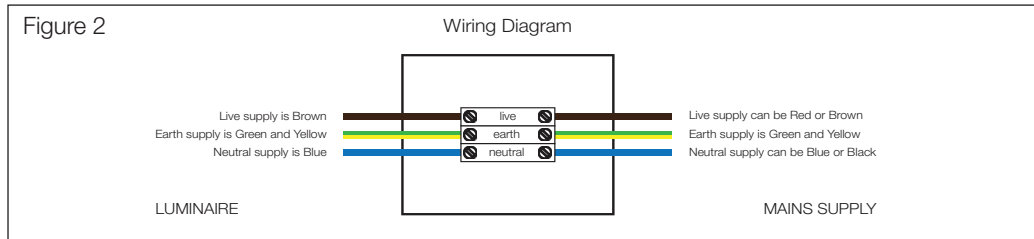

WEEE compliance - must not be mixed with general household waste

HiB Ltd, Castle House,
21-23 Station Road,
New Barnet, Herts,
EN5 1PH

t. 020 8441 0352
f. 020 8441 0219
e. sales@hib.co.uk
w. www.hib.co.uk

©HiB Copyright: No part of this document may be reprinted or duplicated without HiB consent. All sizes and measurements are approximate, but we do try and make sure they are as accurate as possible. In the interest of continuous product development, HiB reserves the right to alter specifications as necessary. E & OE.

Bluetooth™ Mirrors - Fixing Instructions

Thank you for purchasing this HiB product. Please read through these instructions carefully and refer back to them during installation to ensure that your product is fitted safely and that it retains its high quality finish.


Please retain this leaflet for future reference.

Electrical Safety Information


HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician in accordance with current IEE regulations.

Ensure mains power supply is switched off before starting installation.

Before drilling, ensure there are no hidden cables or pipes in the wall.

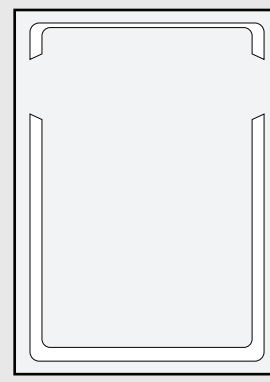


vibe Art no. 77414000

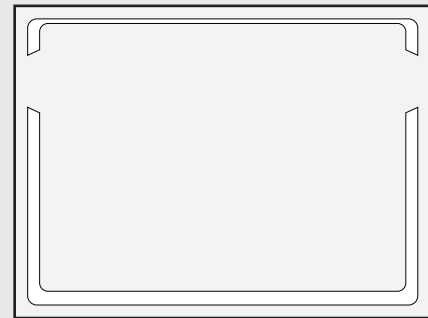

pulse Art no. 77415000

NB. This product must be installed with a minimum distance of 150mm between the infra-red sensor switch and any adjacent wall or object to ensure correct operation of the sensor

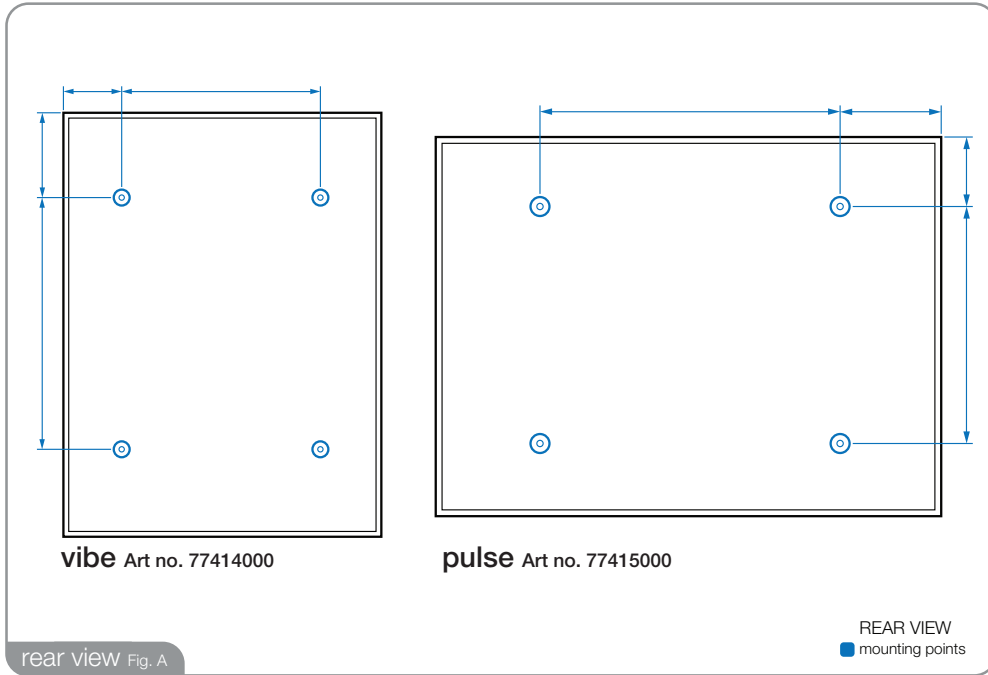

Fixing Instructions

1) Position the mirror in a suitable location (according to the zonal diagram on the back, Figure 1), ensuring that the domestic electrical mains supply is within reach of the electrical entry point of the product.

2) Detach mirror by removing screws on the exterior of the frame.

3) Open the mirror casing and disconnect the heat pad cable and the LED cable. Place the mirror frame to a flat wall surface.

4) Carefully mark the position of the mirror frame using a soft pencil.

5) Remove the mirror and mark the mounting points according to the diagram above (Figure A). Please ensure that all marked mounting points accurately match up with the fixing points on the mirror.

6) Before drilling, ensure there are no hidden cables or pipes behind the mounting points. Using a masonry drill,

drill holes in the marked positions to a suitable depth. If drilling through tile, use a ceramic drill bit.

7) Insert wall plugs level with the surface of the wall. If fitting to a tiled surface, wall plugs should be inserted below the tile surface to avoid cracking. NB. For plasterboard walls, specialist fixings should be purchased, available from any DIY or hardware store.

8) Ensure the domestic electrical mains supply to which the mirror is being connected is turned off. Feed the domestic mains supply wire

through the grommet on the mirror frame.

9) Hold the frame in position, and screw through the holes in the frame into the wall plugs.

10) Connect the domestic mains supply to the terminal box according to the wiring diagram on the back, Figure 2.

11) Ensure the heat pad cable and LED cable are reconnected. Reattach the mirror to the frame.

Operating Instructions

- To turn illumination on or off, operate the sensor switch located at the bottom of the mirror.



- Heated Pad is only on when mirror is illuminated.

- This mirror has a wireless speaker system that use Bluetooth™ wireless technology. You can connect devices such as a mobile phone, digital music player with Bluetooth™, tablet or personal computer with Bluetooth™ to the mirror. The mirror receives stereo audio signal from the source device.

Pairing Device To the Mirror

- To activate the Bluetooth™, operate the sensor switch located at the bottom of the mirror (see figure B). The mirror will give out a tone to confirm it is ready for pairing.

- Activate the Bluetooth™ on your device* (see figure C). Refer to the

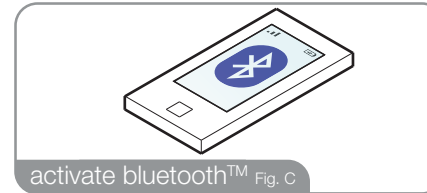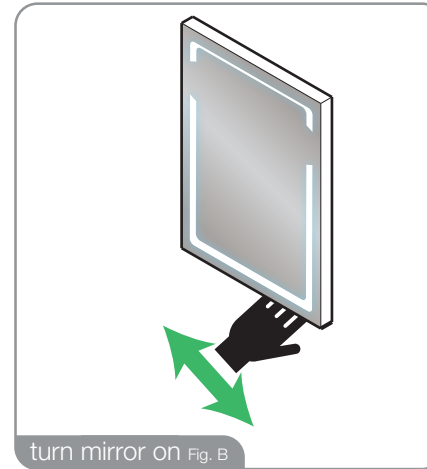

devices instructions for details.

- Search for "HiB001" if prompted for a connection code, use "0000". The mirror will give out a tone to confirm successful connection.

- You can now use your Bluetooth™ device* to listen to music or radio station (see fig. D).

- When the mirror is turned off the connection to the Bluetooth™ will be lost. When the mirror is turned on again it will automatically reconnect to the last connected device.

- Refer to your device manual for operating controls.

- Music will stop playing when a phone call comes into the Bluetooth™ device, and will automatically reconnect when finished.


*Only compatible Smart Phones & Bluetooth™ Devices.

Bulb Replacement

In the unlikely event that the LED light strip should fail please contact HiB customer services for a replacement part at the address shown on the back.

Care Instructions

To preserve the high quality finish of your HiB product, please ensure you regard the following care and cleaning recommendations:

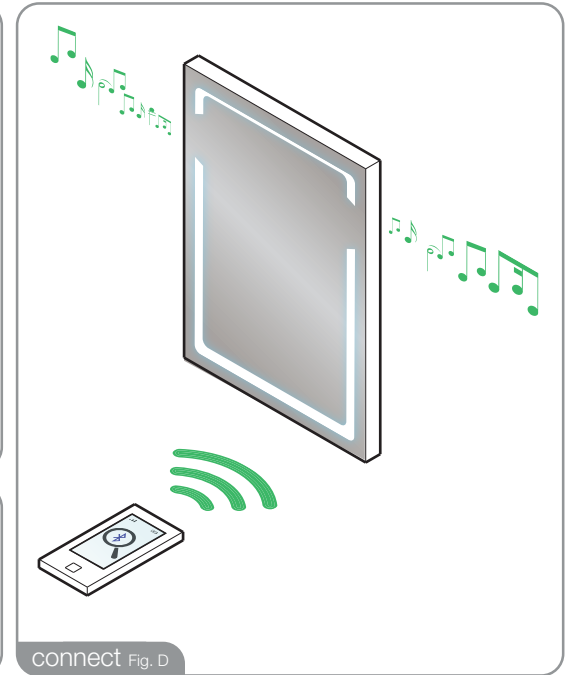

- Do not use abrasives or solvents when cleaning this product.

- Wipe off all water spillages as soon as possible using a soft, damp cloth.

Trouble Shooting Guide

symptoms	possible problem	solution
Device not paired	Bluetooth™ not activated	Check Bluetooth™ is activated on compatible device & mirror is turned on
Device not connecting	Only one device can be connected to the mirror at any one time	Disconnect all devices and reconnect only one device
No volume	Volume is controlled from device	Increase volume on device
No connection	Out of range	Range is within 8 metres, move device closer to mirror