# USER MANUAL




Thank you for choosing Better Bathrooms.

Please read this manual before installing your product and keep for future reference.



# TOUCH CONTROL LED MIRROR WITH DEMISTER

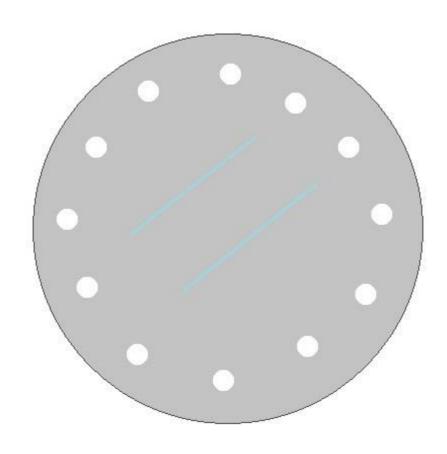

BeBa\_27007

- LED LIGHTS
- DEMISTER
- CONTACTLESS CONTROL
- IP44 INGRESS PROTECTION

#### **CONGRATULATIONS ON YOUR PURCHASE**

Our aim at Better Bathrooms is to bring you extraordinary bathroom products, for less.

If you're after a modern, traditional, or a totally unique style bathroom, we have the fittings and fixtures to bring your ideas to life, so you can fall in love with your space every day.

We hope you're happy with your new product. But if you experience any problems, we're always here to help.

- Call our friendly UK call centre on 0330 390 3062
   (Lines open 9am-4.30pm Monday to Friday, or 9am-2pm Saturday).
- Send us a message via betterbathrooms.com.

#### **CONTENTS**

SAFETY	3
BATHROOM ZONES	4
PARTS SUPPLIED	5
TOOLS REQUIRED	5
INSTALLING THE MIRROR	6
PRODUCT OVERVIEW	7
OPERATION	8
CLEANING AND MAINTENANCE	8
TECHNICAL SPECIFICATIONS	9

#### **SAFETY**


- This mirror should be installed by a qualified electrician.
- This fitting is only suitable for connection to a 220-240V earthed supply in accordance with current IEE wiring regulations, and should be installed in accordance with local Building Regulations.
- This is for domestic, indoor use only.
- The fitting should be connected to a dedicated lighting circuit which must be protected by a 5-amp fuse (or a 6-amp miniature circuit breaker).
- Before installing the fitting ensure the mains supply is switched off, and that the appropriate fuse is removed (or appropriate circuit breaker is switched off) before commencing installation. Ensure that measures are taken to prevent the supply from being inadvertently reconnected.
- If there is a "Minimum Distance" Label, please do not allow Flammable Materials to come within that distance from the unit.
- This product may contain delicate parts be careful during handling and maintenance to avoid breakage.
- If any modification is made to the fitting it will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause electric shock. Never switch on a defective or damaged appliance. Disconnect the appliance from the mains before seeking assistance.
- This product is IP44 rated, and no part of the installation is allowed to be within bathroom Zones 0 or 1. Installation is permitted within Zone 2.
- This product must be earthed. Before commencing installation, ensure that there are no pipes or wires located behind the wall that may be damaged during drilling.
- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage in the wall due to incorrect positioning.
- Check that the mirror is not damaged prior to installation.
- Take care unpacking, do not use a sharp blade to open as this may damage the mirror and void your warranty.
- Installation must only be carried out by a qualified professional or electrician.

## **BATHROOM ZONES**




Zone 0:	The interior of the bathtub or shower basin.		
Zone 1:	The area around the bathtub or shower basin up		
	to a height of 2.25m above the floor		
Zone 2:	The area stretching to 0.6m outside the bath or		
	shower and above the bath or shower if over		
	2.25m		

#### **PARTS SUPPLIED**








SCREWS M4 (X3)


**ALUMINIUM BAR (X1)** 

PLEASE NOTE: It is the installers responsibility to ensure that the fittings are suitable for the type of wall. Alternative fittings may be required (Not Supplied). If unsure professional advice should be sought.

## **TOOLS REQUIRED**




TAPE MEASURE




SPIRIT LEVEL




**ELECTRIC DRILL** 




**SCREWDRIVER** 



**HAMMER** 



8mm DRILL BIT



**PENCIL** 


#### **INSTALLATION**

The mirror is supplied with a hanging bar to mount the mirror onto the wall. At the back of the mirror there is a corresponding bar which is designed to slot onto the hanging bar.


- 1. Choose the desired position of the mirror, and from that determine the required position of the hanging bar.
- 2. Hold the hanging bar in position, using a spirit level to ensure it is level.
- 3. Use a pencil to mark the position of the 3 holes on the wall.
- 4. Place the hanging bar to one side, and drill the holes with a suitable drill bit.
- 5. Insert wall plugs into the holes, ensuring they are flush to the wall.
- 6. Place the hanging bar onto the wall, lining up the 3 holes with the wall plugs.
- 7. Secure the hanging bar to the wall using the supplied screws.



- 8. You will now be able to hang the mirror. Carefully lower the mirror onto the hanging bar, ensuring that it is secure and will not slide.
- 9. The mirror should now be connected to a suitable fused spur following current regulations and guidance. We would advise for this to be situated directly behind the mirror below the hanging bar. When connecting ensure that enough cable is left to allow the mirror to be safely removed from the hanging bar.

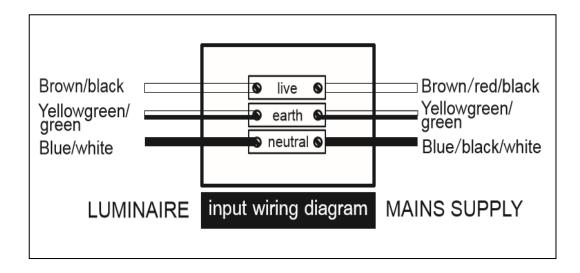

# **PRODUCT OVERVIEW**

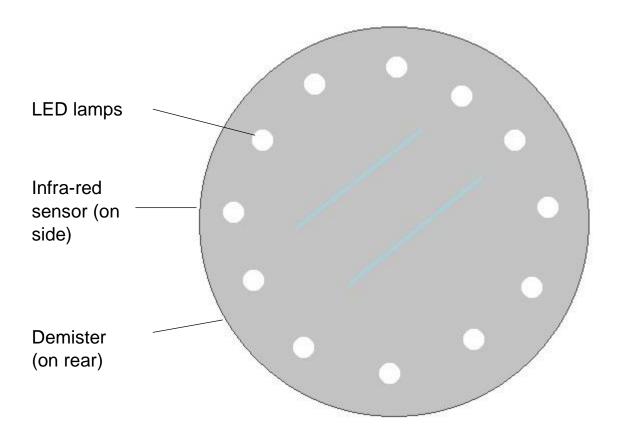

#### **OPERATION**

When the mirror is connected and hung securely onto the wall, turn the mains power back on and the mirror will be ready to use.

Your mirror has an infrared sensor located on the side. To activate the light and the demister, move your hand across the sensor once at a distance of around 5cm.



Holding your hand in front of the sensor will change the colour temperature of the light.

To turn the light and demister off, move your hand across the sensor again.

#### **CLEANING AND MAINTENANCE**

Never use products containing bleach or abrasive cleaners, as these will have a detrimental effect on the appearance and lifespan of the product.

Use a clean micro fibre cloth to clean the mirror.

#### **TECHNICAL SPECIFICATION**

Model	BeBa_27007
LxHxW (cm)	60x60x6
Net Weight (Kg)	5.3
Power Cord length (cm)	53
Rated Power	8W (demister) 16W (LEDs)
IP Rating	IP 44
Input	220 V - 240 V 50 Hz

#### **DISPOSAL**

Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.

Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please contact the local council for details of your local household waste recycling centres.



At the time of printing the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer the regulations are monitored to ensure continued compliance. Further information can be provided upon request.

V20212903

#### For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

