


## **GLOBE PLUS**

Globe Plus 50: Art No 78781000 / Globe Plus 60: Art No 78722000 Globe Plus 80: Art No 78723000

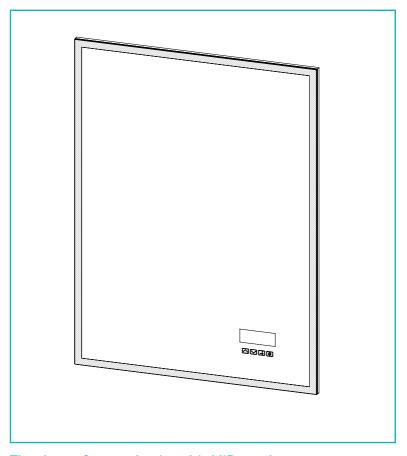

# Thank you for purchasing this HiB product.

Please read through these instructions carefully and refer back to them during installation to ensure that your product is fitted safely and that it retains its high quality finish.

# Electrical Safety Information


HiB recommends that all electrical bathroom products must be installed in accordance with current building and wiring regulations.

If in doubt please contact an electrician.

Before drilling ensure that there are no hidden cables or pipes in the wall.

# Warnings for Safe Use

- This product is intended for Domestic Use only
- Please read the instructions and warnings carefully before installing the product and ensure this document is kept with the product for future reference to ensure product longevity and in the interest of safety.
- If you give the product to another person, please give them this manual as well.
- If any modification is made it will invalidate the warranty and may render the product unsafe.
- This product is IP44 rated and suitable for installation in Zones 2 and Outside Zone according to the IEEE regulations.
- It is not suitable for use in saunas, steam rooms and shower cubicles.
- Appropriate circuit protection should be available for the product.
- When drilling use appropriate eye protection.
- The use of a Residual Current Device (RCD) is advised for any power tools used during the installation of this product.
- Take suitable precautions when handling glass.
- Do not use if glass is broken or unsafe.
- Beware of hidden cables or pipes. Take care if drilling on tiled surfaces in case the drill slips.
- Always switch off the electrical supply to the product at the mains during installation and maintenance.
- It is recommended that this product is installed by a person who is able to meet
  the level of competence required in order to comply with relevant regulations. If
  in doubt consult a qualified tradesperson.
- $\bullet \hspace{0.5cm}$  Do not enter IP44 box unless competent and item is isolated from mains.
- Do not use if any electrical wires appear damaged or degraded.
- This product is designed for installation into a brick or masonry block wall, if
  mounting onto other substrate ensure appropriate fixing and batons (if required)
  are used and the load bearing of the wall is sufficient.
- It is recommended that this product is installed by two people.
- Avoid leaving excessive standing and surface water on the product for prolonged periods of time.
- Dispose of packaging in accordance to local authority regulations.
- At end of life dispose of item according to local authority regulations.

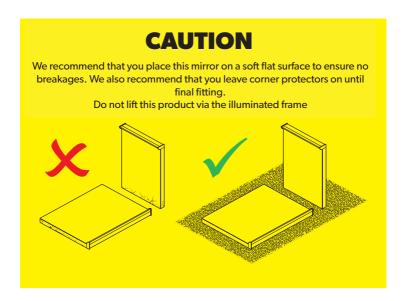

## Electrical Information


This product contains a light source of energy efficiency class **E** 



All installations must comply with guidelines which are based on a zonal concept and must be followed to ensure the safe installation of electrical appliances in the bathroom.

These regulations apply to domestic installations only. Installations must be made in accordance with the current IEE wiring regulations and relevant building regulations.

This product is IP44 rated and is suitable for installation in zones: 2 & Outside Zone

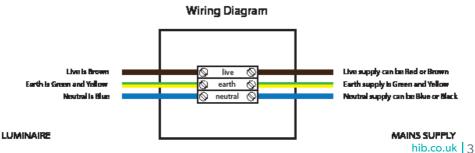

# What's in the Box?

- Globe Plus Mirror
- Fittings pack

# Tools Required



Pencil



Spirit Level



Drill



Drill bit



Screwdriver




Fig 2. - Mounting points




Fig 3. - Operational control buttons

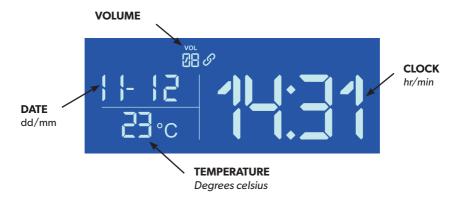


Fig 4. - Bluetooth® Module Interface

#### Installation

#### It is recommended that this product is installed by two people.

- 1. Position the mirror in a suitable location *according to the zonal diagram Fig.* 1, ensuring that the domestic electrical mains supply is within reach of the electrical entry point of the product.
- 2. Carefully mark the position of the mirror using a soft pencil ensuring it is level.
- 3. Remove the mirror and mark the mounting points on the wall, see Fig. 2. Please ensure that all marked mounting points accurately match up with the fixing points on the mirror.
- 4. Using a suitable drill bit, drill holes in the marked positions to a suitable depth. If drilling through tile, use a ceramic drillbit.
- 5. Insert wall plugs level with the surface of the wall. If fitting to a tiled surface, wall plugs should be inserted below the tile surface to avoid cracking. NB. For plasterboard walls, specialist fixings should be purchased, available from any DIY or hardware store.
- 6. Screw supplied fixings into wall plugs.
- 7. Ensure the domestic electrical mains supply to which the mirror is being connected is turned off. Connect the domestic mains supply to the terminal box according to the wiring diagram on page 3.
- 8. Hang the mirror in position.
- $9. \, Switch \, the \, domestic \, electrical \, mains \, supply \, for \, the \, mirror \, back \, on. \,$

**NB.** On first use of the charging socket, there may be resistance when inserting the plug. Make sure that the mirror is held firmly so that it is not pushed off the wall. After a few uses, resistance will ease and the socket will function as normal.

## Operation

#### To switch on/off and adjust illumination colour temperature

- 1. Press the **Power** button once to turn ON illumination and Bluetooth® connectivity, Fig. 3.
- 2. If a Bluetooth® device has been paired previously it will automatically connect and sound a tone to indicate connection.
- 3. To adjust the colour temperature of the illumination press and *HOLD* the **Power** switch. The illumination will start to change colour and cycle through the available colour range.
- 4. When the desired colour temperature is obtained simply release the switch.
- Press the **Power** switch again to turn the illumination mirror OFF.
   NB. If a Bluetooth® device is connected it will be maintained and the screen will remain illuminated.
- 6. To turn the mirror / screen off completely and disconnect from a paired device press and *HOLD* **Power** switch for 3 seconds.

#### Pairing and un-pairing a device to the mirror

- 1. To activate the Bluetooth®, turn the mirror on by pressing the **Power** switch, *Fig. 3*.
- 2. Activate the Bluetooth® on your device. Refer to the device's operations manual for details.
- Search for 'HiB002'. The mirror will sound a tone to indicate a successful pairing connection.
- 4. Once connected the 'chain-link' symbol will stop flashing to indicate that the device is now connected, Fig. 4.
- 5. You can now play audio through your Bluetooth® mirror.
- 6. When the mirror is turned off the connection to the Bluetooth® module will be lost.
- 7. When the mirror is turned on again it will automatically reconnect to the last connected device if it is still within range.

#### Playback / Volume adjustments

- When a device is connected and content is playing you can skip the song by pressing the UP switch.
- 2. You can play the previous song by pressing the **DOWN** switch.
- 3. To adjust the volume up PRESS and HOLD the **UP** switch.
- 4. To adjust the volume down PRESS and HOLD the **DOWN** switch.

#### To adjust the Clock and Date

NB. - Ensure mirror illumination is turned off.

- 1. Press and hold the Clock/Date switch, Fig. 3.
- 2. After 3 seconds the display will start 'blinking' indicating the edit mode has been activated.
- 3. Adjust the time or date accordingly by pressing the **UP** or **DOWN** switches.
- 4. When the correct setting has been reached press the **Clock/Date** switch again to move to the next editable element.
- 5. The function will cycle through the following: Time **HOUR**

Time - MINUTE
Date - DAY
Date - MONTH
Date - YEAR

6. Press the **Clock/Date** button again to confirm changes.

### Care

To preserve the high quality finish of your HiB product, please ensure you regard the following care and cleaning recommendations:

- Clean the product with water and a soft cloth, a mild detergent may be used if required.
- Ensure any excess moisture is removed after use.
- Do not use abrasive sponges or cleaning agents.
- Avoid leaving excessive standing and surface water on the product for prolonged periods of time.

### Aftercare

In the unlikely event that this product should fail please contact the retailer from which the item was purchased.



**WEEE** compliance

Must not be mixed with general household waste