



Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

better 
bathrooms

RECTANGULAR BACKLIT BATHROOM MIRROR WITH BATTERY OPERATED LIGHTS (700 x 500mm) - Vela



VELAB700

- BATTERY POWERED
- LED LIGHT
- IP44 INGRESS PROTECTION

CONGRATULATIONS ON YOUR PURCHASE

Our aim at Better Bathrooms is to bring you extraordinary bathroom products for less.

If you’re after a modern, traditional, or totally unique bathroom style, we have the fittings and fixtures to bring your ideas to life so you can fall in love with your space every day.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- Log in to your account and contact our customer services team via your self-service portal – betterbathrooms.com/CustomerAccount/Login
- Contact us via betterbathrooms.com/contact/contact-us


CONTENTS

SAFETY	3
BATHROOM ZONES	4
PARTS SUPPLIED	4
TOOLS REQUIRED	5
PRODUCT OVERVIEW	5
PRODUCT DIMENSIONS	6
INSTALLING THE MIRROR	7
OPERATION	7
CLEANING AND MAINTENANCE	7
TECHNICAL SPECIFICATIONS	10
DISPOSAL	10

SAFETY


- This is for domestic, indoor use only.
- If there is a “Minimum Distance” Label, please do not allow Flammable Materials to rest within that distance from the unit.
- This product may contain delicate parts – be careful during handling and maintenance to avoid breakage.
- Any modification to the fitting will invalidate the warranty and may render the product unsafe.
- This product is IP44 rated, and no part of the installation is allowed to be within bathroom Zones 0 or 1. Installation is permitted within Zone 2.
- Before commencing installation, ensure that there are no pipes or wires located behind the wall that may be damaged during drilling.
- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
- Check that the mirror is not damaged prior to installation.
- Once installed, a bead of silicone can be applied between the mirror and the wall along the top and sides of the unit. Do not seal the bottom edge, as this may trap water behind the mirror and cause damage.
- Take care of unpacking, and do not use a sharp blade to open it, as this may damage the mirror and void your warranty.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the entire luminaire shall be replaced.
- Use only high-quality alkaline AA batteries.
- Do not expose batteries or the product to excessive heat (e.g. direct sunlight or near radiators).
- Do not mix old and new batteries.
- Do not mix different battery types or brands.
- Insert batteries with the correct polarity.
- Do not recharge non-rechargeable batteries.
- Do not disassemble or dispose of batteries in fire.
- Ensure battery compartment is fully closed before use.
- Remove batteries if the product will not be used for a long time.
- Keep batteries out of reach of children.
- Do not short-circuit battery terminals.
- Dispose of used batteries according to local regulations.

BATHROOM ZONES

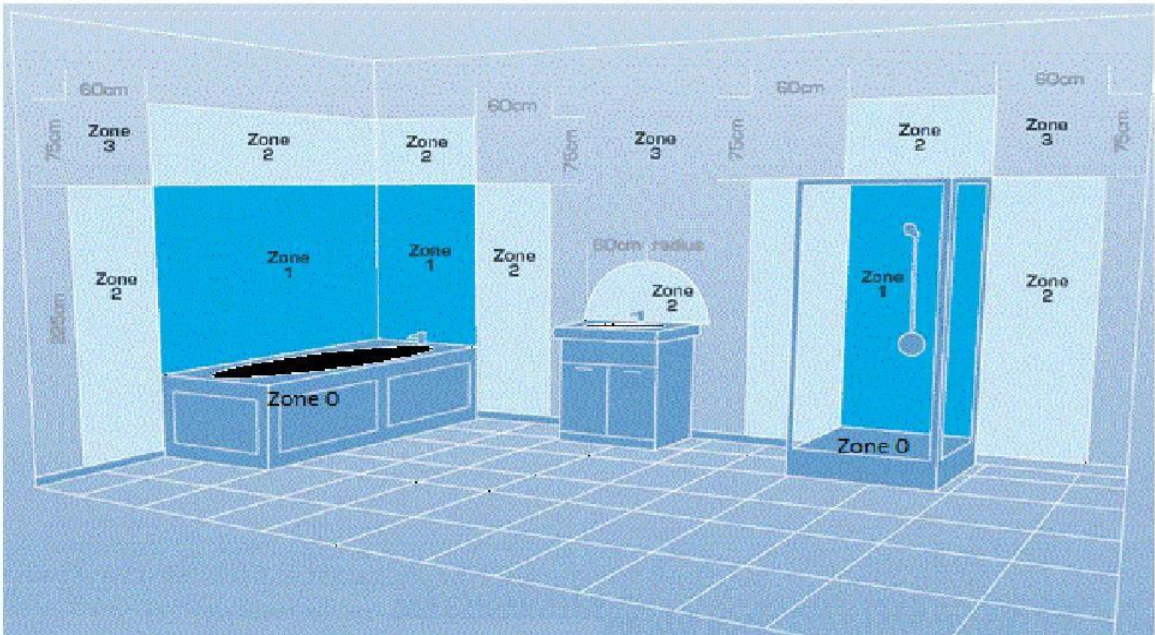


Zone 0:	The interior of the bathtub or shower basin.
Zone 1:	The area around the bathtub or shower basin up to a height of 2.25m above the floor
Zone 2:	The area stretching to 0.6m outside the bath or shower and above the bath or shower if over 2.25m


PARTS SUPPLIED

	
SCREWS (X2)	WALL PLUGS (x2)


TOOLS REQUIRED




TAPE MEASURE




SPIRIT LEVEL




ELECTRIC DRILL




FLAT HEAD
SCREWDRIVER



HAMMER




8mm DRILL BIT





PENCIL

PRODUCT OVERVIEW

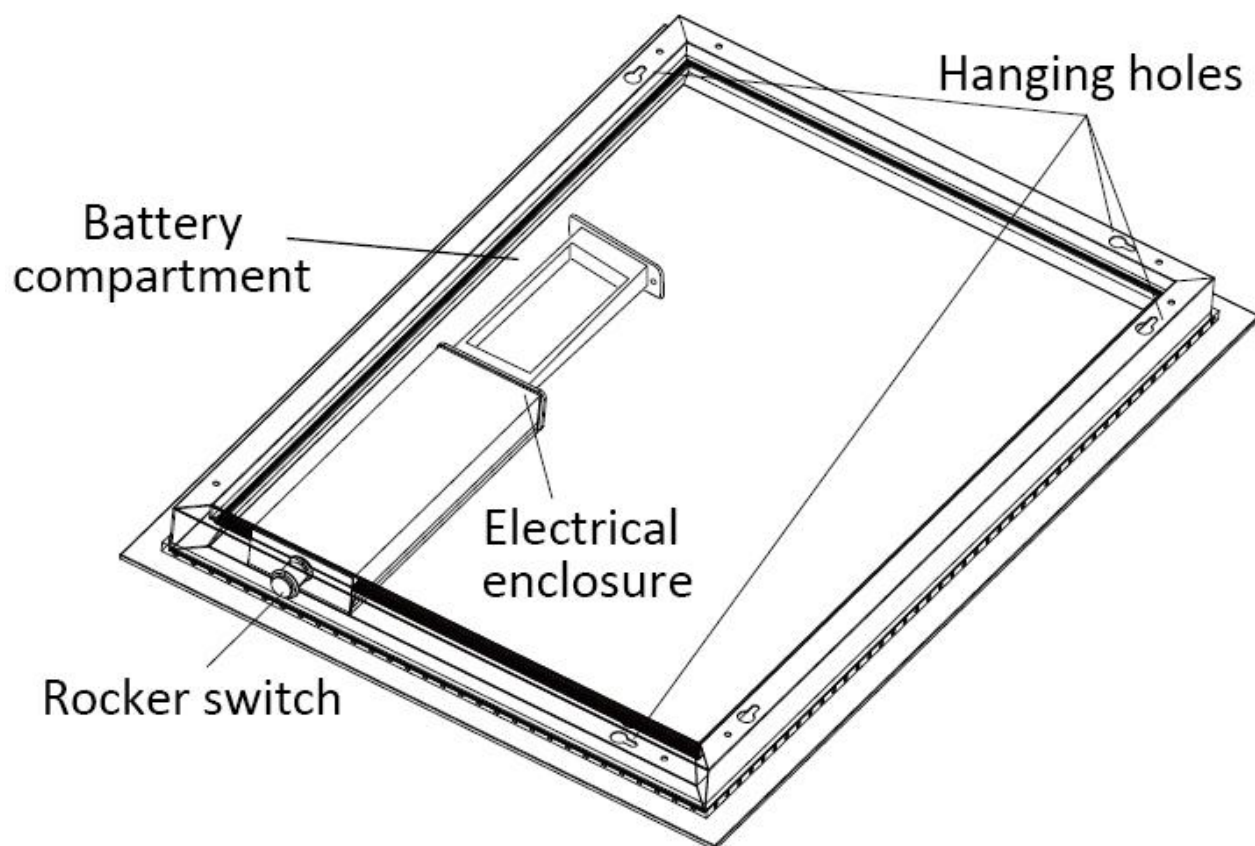

PRODUCT DIMENSIONS

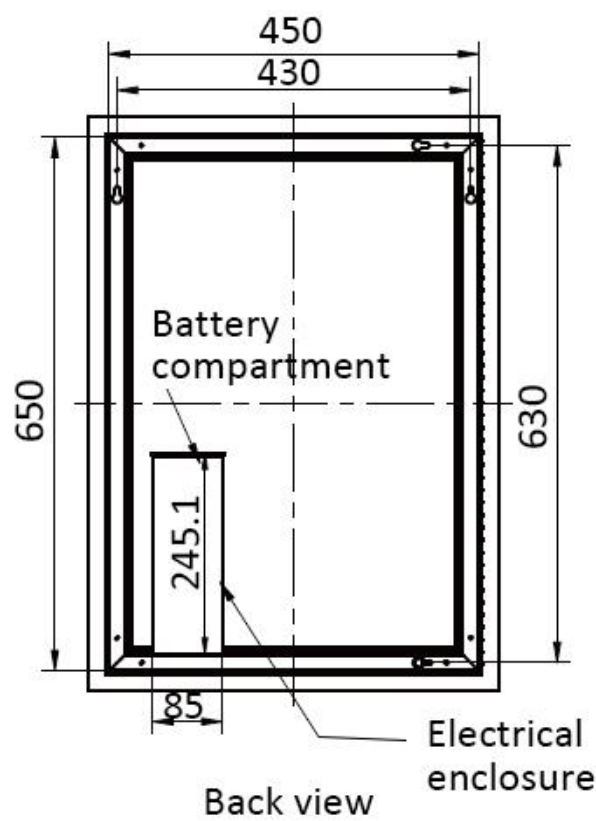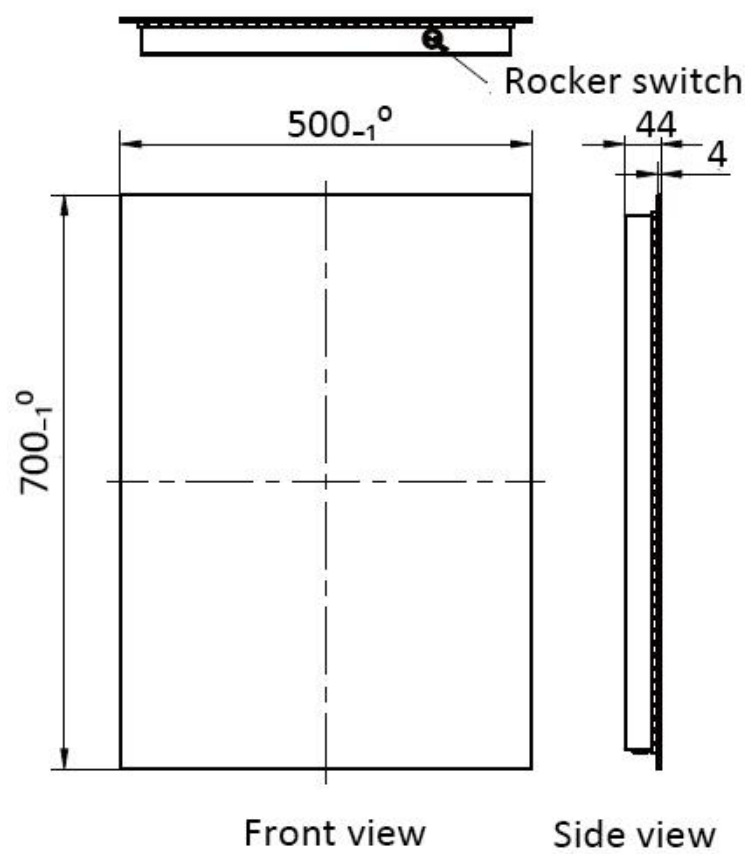

INSTALLATION

IMPORTANT: Before commencing installation, ensure that there are no pipes or wires located behind the wall that you will be drilling into and check the item is functional with inserted batteries (not supplied).

This mirror is designed for both landscape and portrait installation. On the back of the mirror, there are four keyhole slots—two on the vertical sides and two on the horizontal sides.

- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
- Check that the mirror is not damaged prior to installation.
- Take care of unpacking, and do not use a sharp blade to open it, as this may damage the mirror and void your warranty.

Follow the instructions in the “REPLACING THE BATTERIES” section and test the mirror turns on and off. If it does not, please contact customer services.

1. Mark the drill hole spots on your wall using a spirit level to ensure they are level.
2. Drill the holes in the wall with an 8mm drill bit and insert two wall plugs.
3. Insert the screws, leaving them protruding by 3mm. It is recommended that these levels be checked again with the spirit level.
4. Hang the mirror on the screws vertically or horizontally, depending on preference.



OPERATION

This mirror has a rocker switch located near the base. Press the side marked “I” to turn on the lights, and the side marked “O” to turn them off.




CLEANING AND MAINTENANCE

Never use products containing bleach or abrasive cleaners, as this will have a detrimental effect on the appearance and lifespan of the product.


Use a clean microfibre cloth to clean the mirror.

REPLACING THE BATTERIES (NOT SUPPLIED)


1. Unscrew the battery compartment from the back of the mirror and carefully pull it out.

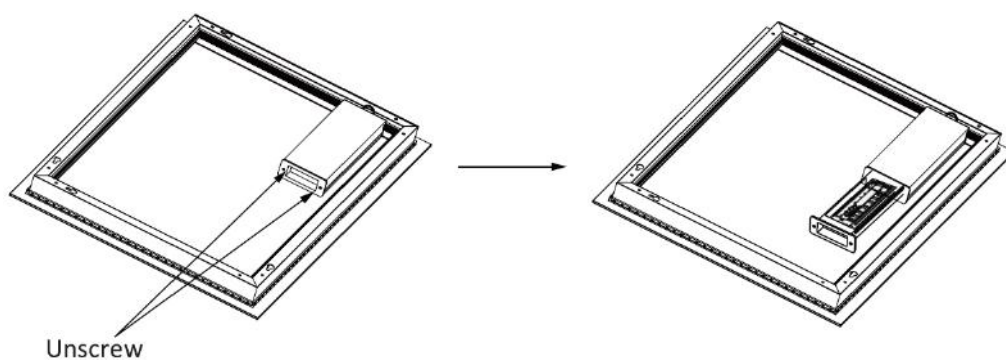


2. On top of the battery compartment is a cover secured by a screw. Remove this screw to open the cover.

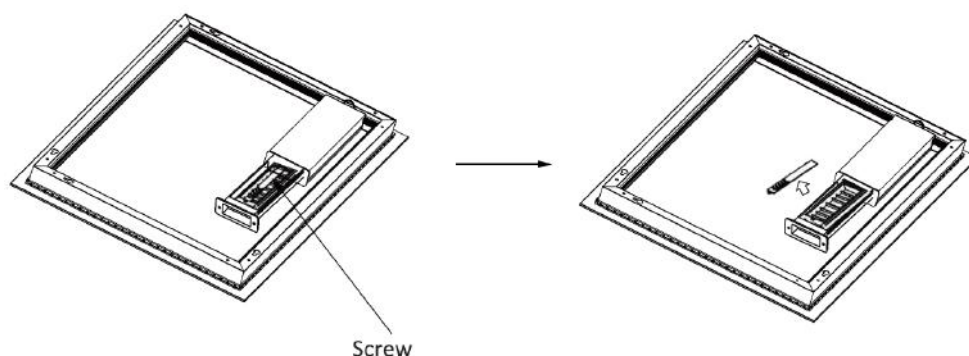

3. Insert 8 × AA 1.5V batteries (not included) into the battery compartment, ensuring correct polarity. Reattach the cover and tighten the screw.

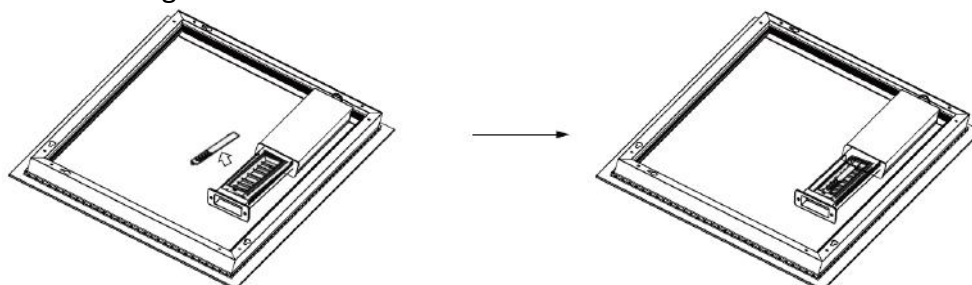

4. Slide the battery compartment back into place at the rear of the mirror. Tighten the screws securely.

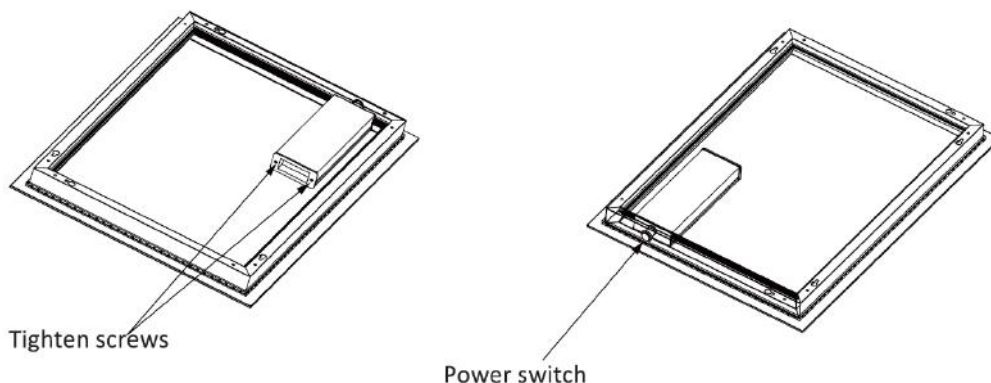

5. Press the side marked "I" to turn on the lights and test functionality.

NOTE: For optimal performance, we recommend using high-capacity alkaline batteries. Using lower-capacity batteries may reduce brightness and shorten battery life.

TECHNICAL SPECIFICATION

Model	VELAB700
WxHxD (mm)	500x700x44
Net Weight (Kg)	5
IP Rating	IP 44
Rated Power	2.7W
Input	DC 1.5V (8 x 1.5V AA batteries) not supplied

This product contains a light source of energy efficiency class F and must only be replaced by a professional or similarly qualified person.

DISPOSAL

Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.

Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please get in touch with the local council for details of your local household waste recycling centres.



At the time of printing the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation, the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer, we monitor the regulations to ensure continued compliance. Further information can be provided upon request.

For more information

- visit betterbathrooms.com
- email support@betterbathrooms.com
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA